


920CL

Fiber Optic Cleaver

Fast, Accurate and Reliable Fiber Cleaving

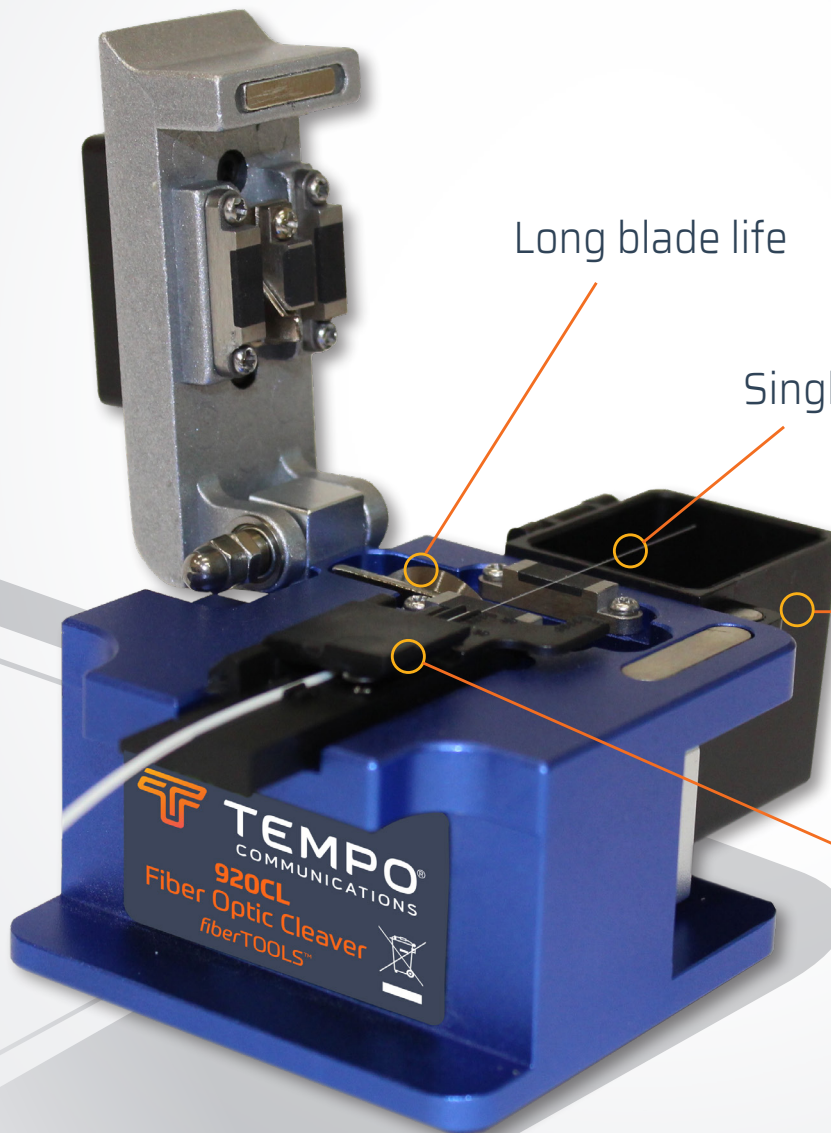

Long blade life

Singlemode and multimode fibers

Dust bin safely collects end cuts

Cleave 250 micron, 900 micron, 3mm and Bowtie fibers

1390 Aspen Way Vista, CA • 92081 TC6714 REV 01/20

Latin America Phone : 1.760.510.0558 | EMEA Phone: +44 (0) 1633 927 050
©2019 Tempo Communications Inc. • An ISO 9001 Company

EMEA Address: Tempo Communications Limited • Brecon House,
William Brown Close, Cwmbran • NP44 3AB, UK



Renewed Vision. Innovation Forward.

TempoCom.com | tel 800.642.2155

920CL

Fiber Optic Cleaver



BENEFITS:

- **Accurate Cleaves.** Cleave multi-mode and single-mode fiber optic cables.
- **Long Life.** Blades rotate for longer life - over 48,000 cleaves.
- **Adaptable.** Supports 250 micron, 900 micron, 3mm and Bowtie fibers.
- **Dust bin.** Safely collects end cuts during cleaving process.
- **Fixed Clamp.** For use as a standalone cleaver.

SPECIFICATIONS:

920CL	Fiber Type:	SM (G.652); MM (G.651); DS (G.653); NZDS (G.655); BIF (G.657)
	Fiber Cleave Length:	5mm to 25mm
	Cladding Diameter:	125µm
	Coating Diameter:	0.25mm and 0.9mm
	Fiber Count:	Single
	Cleaving Angle:	< 0.5°
	Blade Life:	48,000 Cleaves
	Weight:	0.68lbs (310g)
	Dimensions:	2.13 x 2.28 x 2.28" (54 x 58 x 58 mm)

*Specifications subject to change without notice.

ORDERING INFORMATION:

CAT. NO.	DESCRIPTION
920CL	Fiber Optic Cleaver
920CL CLVR Case	Cleaver Case
07111	Fixed Clamp with Screw
04268	Replacement Screw for Fixed Clamp

CONTENTS:

- 920CL Cleaver with Fixed Clamp installed
- 2.5mm Allen Key
- Instruction Sheet
- Hard Carry Case

1390 Aspen Way Vista, CA • 92081 TC6714 REV 01/20

Latin America Phone : 1.760.510.0558 | EMEA Phone: +44 (0) 1633 927 0505
©2019 Tempo Communications Inc. • An ISO 9001 Company

EMEA Address: Tempo Communications Limited • Brecon House,
William Brown Close, Cwmbran • NP44 3AB, UK



TEMPO
COMMUNICATIONS

Renewed Vision. Innovation Forward.



Follow us @TempoComms

TempoCom.com | tel 800.642.2155