


# Data sheet

## chainflex® CF211





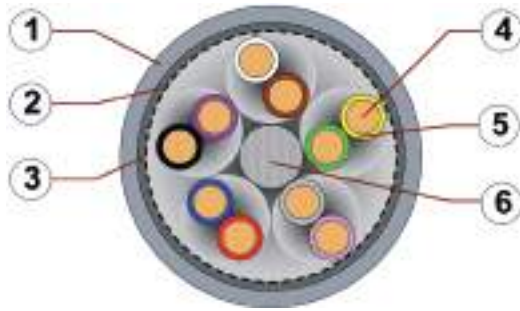




Data cable (Class 5.5.2.1) ● For heavy duty applications ● PVC outer jacket ● Shielded  
 ● Twisted pair ● Oil-resistant ● Flame retardant



1. Outer jacket: Pressure extruded, oil-resistant PVC mixture
2. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
3. Banding: Plastic foil
4. Conductor: Very finely stranded special cores of particularly high-flex design made of bare copper wires
5. Core insulation: Mechanically high-quality TPE mixture
6. Strain relief: Tensile stress-resistant centre element

**Example image**  
 For detailed overview please see design table

### Cable structure

	<b>Conductor</b>	Very finely stranded special conductors of particularly bending resistant design made of bare copper wires.
	<b>Core insulation</b>	Mechanically high-quality TPE mixture.
	<b>Core structure</b>	Cores twisted in pairs with a short pitch length, core pairs then wound with short pitch lengths.
	<b>Core identification</b>	Colour code in accordance with DIN 47100
	<b>Intermediate layer</b>	Foil taping over the outer layer.
	<b>Overall shield</b>	Extremely bending-resistant braiding made of tinned copper wires. Coverage approx. 70 % linear, approx. 90 % optical
	<b>Outer jacket</b>	Low-adhesion, oil-resistant PVC mixture, adapted to suit the requirements in e-chains® (following DIN EN 50363-4-1). Colour: Silver-grey (similar to RAL 7001) Printing: black

„00000 m\*\* igus chainflex CF211.--.02① ----② E310776 cRUus

AWM Style 2464 VW-1 AWM I/II A/B 80°C 300V FT1 EAC/CTP CE

RoHS-II conform [www.igus.de](http://www.igus.de) +++ chainflex cable works +++

\* **Length printing:** Not calibrated. Only intended as an orientation aid.  
 ① / ② Cable identification according to Part No. (see technical table).  
 Example: ... chainflex ... CF211.02.04.02 ... (4x(2x0.25))C ... E310776 ...



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image

# Data sheet

## chainflex® CF211








Data cable (Class 5.5.2.1) ● For heavy duty applications ● PVC outer jacket ● Shielded  
 ● Twisted pair ● Oil-resistant ● Flame retardant



Example image

### Dynamic information

	<b>Bend radius</b>	<b>e-chain® linear</b> <b>flexible</b> <b>fixed</b>	minimum 7.5 x d minimum 6 x d minimum 4 x d
	<b>Temperature</b>	<b>e-chain® linear</b> <b>flexible</b> <b>fixed</b>	+5 °C up to +70 °C -5 °C up to +70 °C (following DIN EN 60811-504) -15 °C up to +70 °C (following DIN EN 50305)
	<b>v max.</b>	<b>unsupported</b> <b>gliding</b>	5 m/s 3 m/s
	<b>a max.</b>		50 m/s <sup>2</sup>
	<b>Travel distance</b>		Unsupported travels and up to 100 m for gliding applications, Class 5



These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

### Guaranteed service life according to guarantee conditions

Double strokes	5 million	7.5 million	10 million
Temperature, from/to [°C]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]
+5/+15	10	11	12
+15/+60	7.5	8.5	9.5
+60/+70	10	11	12

Minimum guaranteed service life of the cable under the specified conditions.  
 The installation of the cable is recommended within the middle temperature range.

### Electrical information

	<b>Nominal voltage</b>	300/300 V (following DIN VDE 0298-3) 300 V (following UL)
	<b>Testing voltage</b>	1500 V (following DIN EN 50395)



# Data sheet

## chainflex® CF211













Data cable (Class 5.5.2.1) ● For heavy duty applications ● PVC outer jacket ● Shielded  
 ● Twisted pair ● Oil-resistant ● Flame retardant



Example image

### Properties and approvals

-  **Oil resistance** Oil-resistant (following DIN EN 50363-4-1), Class 2
-  **Flame retardant** According to IEC 60332-1-2, FT1, VW-1
-  **Silicone-free** Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
-  **UL verified** Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
-  **UL/CSA AWM** See data sheet for details ► [www.igus.eu/CF211](http://www.igus.eu/CF211)
-  **NFPA** Following NFPA 79-2018, chapter 12.9
-  **EAC** Certificate No. RU C-DE.ME77.B.00300/19 (TR ZU)
-  **REACH** In accordance with regulation (EC) No. 1907/2006 (REACH)
-  **Lead-free** Following 2011/65/EC (RoHS-II/RoHS-III)
-  **Cleanroom** According to ISO Class 1. The outer jacket material of this series complies with CF240.02.24 - tested by IPA according to standard DIN EN ISO 14644-1
-  **CE** Following 2014/35/EU

### Properties and approvals

#### UL/CSA AWM Details

Conductor nominal cross section [mm²]	Number of cores	UL style core insulation	UL style outer jacket	UL Voltage Rating [V]	UL Temperature Rating [°C]
0.25	2-28	10493	2464	300	80
0.34	6-16	10493	2464	300	80
0.5	2-28	10493	2464	300	80



# Data sheet

## chainflex® CF211




Data cable (Class 5.5.2.1) ● For heavy duty applications ● PVC outer jacket ● Shielded  
 ● Twisted pair ● Oil-resistant ● Flame retardant



Example image

### Typical lab test setup for this cable series

Test bend radius R	approx. 35 - 75 mm
Test travel S	approx. 1 - 15 m
Test duration	minimum 2 - 4 million double strokes
Test speed	approx. 0.5 - 2 m / s
Test acceleration	approx. 0.5 - 1.5 m / s <sup>2</sup>

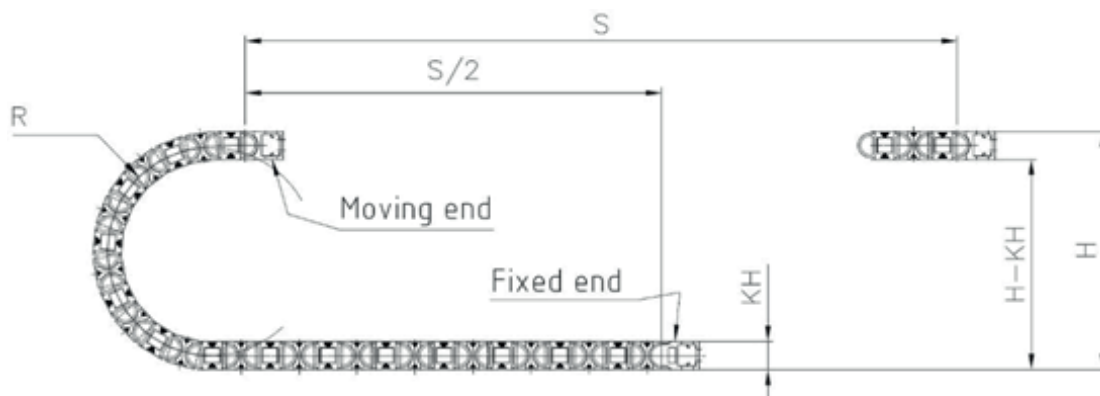

### Typical application areas

- For heavy duty applications, Class 5
- Unsupported travel distances and up to 100 m for gliding applications, Class 5
- Light oil influence, Class 2
- No torsion, Class 1
- Preferably indoor applications, but also outdoor ones at temperatures  $> 5\text{ °C}$
- Storage and retrieval units for high-bay warehouses, machining units/package machines, Handling, indoor cranes



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



# Data sheet

## chainflex® CF211



Data cable (Class 5.5.2.1) ● For heavy duty applications ● PVC outer jacket ● Shielded  
● Twisted pair ● Oil-resistant ● Flame retardant

### Technical tables:

#### Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm <sup>2</sup> ]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CF211.02.01.02	(2x0.25)C	5.0	18	33
CF211.02.02.02 <sup>2)</sup>	(2x(2x0.25))C	6.5	25	51
CF211.02.03.02	(3x(2x0.25))C	7.0	36	63
CF211.02.04.02	(4x(2x0.25))C	7.5	44	76
CF211.02.05.02	(5x(2x0.25))C	8.5	52	92
CF211.02.06.02	(6x(2x0.25))C	9.0	62	105
CF211.02.08.02	(8x(2x0.25))C	10.5	78	137
CF211.02.10.02	(10x(2x0.25))C	12.0	90	170
CF211.02.14.02	(14x(2x0.25))C	12.0	119	204
CF211.03.03.02	(3x(2x0.34))C	8.0	44	86
CF211.03.08.02	(8x(2x0.34))C	12.0	102	206
CF211.05.01.02	(2x0.5)C	6.0	26	51
CF211.05.02.02 <sup>2)</sup>	(2x(2x0.5))C	8.5	46	90
CF211.05.03.02	(3x(2x0.5))C	9.0	61	109
CF211.05.04.02	(4x(2x0.5))C	9.5	74	125
CF211.05.05.02	(5x(2x0.5))C	11.0	91	153
CF211.05.06.02	(6x(2x0.5))C	11.5	103	189
CF211.05.08.02	(8x(2x0.5))C	13.0	137	234
CF211.05.10.02	(10x(2x0.5))C	15.5	181	326
CF211.05.14.02	(14x(2x0.5))C	16.0	193	341

<sup>2)</sup> The chainflex® types marked with 2) are cables designed as a star-quad.

**Note:** The given outer diameters are maximum values and may tend toward lower tolerance limits.  
G = with green-yellow earth core x = without earth core

#### Electrical information

Conductor nominal cross section [mm <sup>2</sup> ]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Max. current rating at 30 °C [A]
0.25	79	5
0.34	57	7
0.5	39	10

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



Example image



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



# Data sheet

## chainflex® CF211



Data cable (Class 5.5.2.1) ● For heavy duty applications ● PVC outer jacket ● Shielded  
 ● Twisted pair ● Oil-resistant ● Flame retardant

### Design table

Part No.	Number of cores	Core design	Part No.	Number of cores	Core design
CF211.XX.01.02	2		CF211.XX.06.02	6x2	
CF211.XX.02.02	4		CF211.XX.08.02	8x2	
CF211.XX.03.02	3x2		CF211.XX.10.02	10x2	
CF211.XX.04.02	4x2		CF211.XX.14.02	14x2	
CF211.XX.05.02	5x2				



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image

# Data sheet

## chainflex® CF211



Data cable (Class 5.5.2.1) ● For heavy duty applications ● PVC outer jacket ● Shielded  
 ● Twisted pair ● Oil-resistant ● Flame retardant

### Colour code in accordance with DIN 47100

Conductor no.	Colours according to DIN ISO 47100	Conductor no.	Colours according to DIN ISO 47100	Conductor no.	Colours according to DIN ISO 47100
1	white	22	brown-blue	43	blue-black
2	brown	23	white-red	44	red-black
3	green	24	brown-red	45	white-brown-black
4	yellow	25	white-black	46	yellow-green-black
5	grey	26	brown-black	47	grey-pink-black
6	pink	27	grey-green	48	red-blue-black
7	blue	28	yellow-grey	49	white-green-black
8	red	29	pink-green	50	brown-green-black
9	black	30	yellow-pink	51	white-yellow-black
10	violet	31	green-blue	52	yellow-brown-black
11	grey-pink	32	yellow-blue	53	white-grey-black
12	red-blue	33	green-red	54	grey-brown-black
13	white-green	34	yellow-red	55	white-pink-black
14	brown-green	35	green-black	56	pink-brown-black
15	white-yellow	36	yellow-black	57	white-blue-black
16	brown-yellow	37	grey-blue	58	brown-blue-black
17	white-grey	38	pink-blue	59	white-red-black
18	brown-grey	39	grey-red	60	brown-red-black
19	white-pink	40	pink-red	61	black-white
20	white-brown	41	grey-black		
21	white-blue	42	pink-black		



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image