

General Purpose Compact Limit Switches









Model LS | General purpose limit switches with robust construction in an extensive range of models, for use in a wide range of applications.



- UL/CSA/CE /GB (ccc marking) certified (excluding some models)
- UL listing is pending (excluding some models)
- 2-circuit double break basic switch with rugged die-cast aluminum case
- Oil-, water- and dust-proof structure (IP67 protective structure)
- Wide range of options available: with neon lamp, with LED lamp, built-in gold-plated contacts, with double seal, corrosion-resistant, heat-resistant, cold-resistant, spatter-guarded, connector type, etc
- Operation position setting indicator (roller lever and roller plunger types)

LIST OF MODELS

| Appearance | Roller lever | Plunger | Side roller plunger | Roller plunger | Fork lever lock | Non-directional operating rod lever | Reference page for individual specifications |
|---|---|---|---|---|---|-------------------------------------|--|
|  |  |  |  |  |  | | |
| Model | 1LS Series | 2LS Series | 3LS Series | 5LS Series | 6LS Series | 8LS Series | |
| General purpose | <input type="checkbox"/> LS <input type="checkbox"/> -J | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | D-023 |
| Spatter-guarded | <input type="checkbox"/> LS <input type="checkbox"/> -JW <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | D-050 |
| Ultra long life | 1LS-J7 <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | D-058 |
| Weather resistant | 1LS-J8 <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | D-067 |
| All stainless steel | 1LS <input type="checkbox"/> -J401 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | D-071 |

STANDARD, GENERAL PURPOSE COMPACT TYPE

Most versatile LS compact limit-switch model, used in a wide range of applications.



- Wide range of models includes standard, high sensitivity, high overtravel, T.T. 90°, light operation and lock operation types.
- Wide range of actuator types.
- Certified compliance with a variety of international standards (excluding some models) (UL/CSA, EN 60947-5-1, GB14048.5-2001 etc.)
- Connector/prelead connector also available.
- With LED lamp (12V to 125 Vac/dc). Neon lamp also available.
- Wide range of models includes double-sealed, corrosion-resistant, heat-resistant, and cold-resistant types.
- Low current load model also available.
- Sequencer-compatible indicator
The energizing current of models with an LED indicator is 0.6 mA max.

STANDARDS COMPLIANCE

| Certifying Body | Standard | File No. |
|-----------------|-----------------|------------------|
| UL | UL 1054 | E 37559 |
| CSA | CSA C22.2 No.55 | LR 61643 |
| TÜV | EN 60947-5-1 | R 9451261 |
| CQC | GB14048.5 | 2003010305083775 |

* For applicable models, refer to the CATALOG LISTING.


PERFORMANCE

| Item | Model | Roller lever | Plunger | Side roller plunger | Roller plunger | Fork lever lock | Non-directional operation type | | | | |
|---|--|---|---|---------------------------------------|---------------------------|---|---|---------------------------|----------------------------------|----------|--|
| Model | Roller lever | Plunger | Side roller plunger | Roller plunger | Fork lever lock | Non-directional operation type | | | | | |
| Standards | Compliance | NECA C 4508/JIS C 8201-5-1, IEC 60947-5-1 | | | | | | | | | |
| | Certification *1 | UL1054, CSA C22.5 No.55, EN 60947-5-1, GB 14048.5-2001 | | | | | | | | | |
| Structure | Contact form | 2-circuit double break | | | | | | | | | |
| | Contact type | Standard load | Silver, rivet | | | | | | | | |
| | | Low current load | Gold-plated silver, rivet | | | | | | | | |
| | Terminal type | M4 screw (binding head machine screw with toothed washer), DIN 4-pin connector (M12 size), preleaded | | | | | | | | | |
| | Protective structure | IP67 (IEC60529, JIS C 0920) | | | | | | | | | |
| | Pollution level | 3 (EN 60947-5-1)*2 | | | | | | | | | |
| Electrical performance (1): General characteristics | Electrical rating | See page D-026. | | | | | | | | | |
| | Dielectric strength | Between non-continuous terminals : 1,000 Vac, 50/60 Hz for 1 minute (standard operating characteristics type) : 600 Vac, 50/60 Hz for 1 minute (roller lever, high sensitivity characteristics type) Between each terminal and non-live metal part : 2,000 Vac, 50/60 Hz for 1 minute. Between each terminal and ground : 2,000 Vac, 50/60 Hz for 1 minute (only G-type products with ground terminals). | | | | | | | | | |
| | Insulation resistance | Min. 100 MΩ (by 500 Vdc megger) | | | | | | | | | |
| | Initial contact resistance | Standard load | Max. 50 mΩ (6 to 8 Vdc, thermal current 1A, voltage drop method) | | | | | | | | |
| | | Low current load | Max. 100 mΩ (6 to 8 Vdc, thermal current 0.1A, voltage drop method) | | | | | | | | |
| Connector | Max. 40 mΩ (excluding fixed resistance such as cable) | | | | | | | | | | |
| Contact voltage/min.current | 24V 10 mA, 12V 20 mA (standard load), 5V 10 mA (low current load) | | | | | | | | | | |
| Electrical performance (2) EN60947-5-1 GB140 48.5-2001 | Rated operating voltage | 120/240 Vac, 30 Vdc | | | | | | | | | |
| | Rated thermal current (Ith) | Silver contacts: 10A. Gold-plated contacts: 1A. | | | | | | | | | |
| | Rated frequency | 45 to 65 Hz and DC | | | | | | | | | |
| | Short-circuit protection | TUV F10A fuse (IEC 60127) / CQC instant blowing fuses: silver contacts 15A, gold contacts 3A / TUV | | | | | | | | | |
| | Rated insulating voltage (UI) | 125 / 250 Vac | | | | | | | | | |
| | Rated conditional short-circuit current | 1,000A | | | | | | | | | |
| | Switching overvoltage | Category III (IEC 60204-1) | | | | | | | | | |
| | Rated impulse dielectric strength (Uimp) | Between each terminal and ground, and between terminals: 2,500V. | | | | | | | | | |
| | Actuator strength | Withstands load 5 times O.F. for 1 minute (in operating direction) | | | | | | | | | |
| | Terminal strength | Withstands tightening torque of 1.5 N·m for 1 minute | | | | | | | | | |
| Mechanical performance | Impact resistance | High sensitivity roller lever type | 200 m/s ² in free and total travel positions | | | | | | | | |
| | | Light operation roller lever & non-directional roller lever types | 200 m/s ² in total travel position | | | | | | | | |
| | | Non-directional operation type | 300 m/s ² in total travel position | | | | | | | | |
| | | Models other than the above | 300 m/s ² in free and total travel positions | | | | | | | | |
| | Contact opening for 1 ms max. in free and total travel positions (NECA C 4508) | | | | | | | | | | |
| Vibration resistance | 1.5 mm peak-to-peak amplitude, frequency 10 to 55 Hz, for 2 continuous hours (NECA C 4508) | | | | | | | | | | |
| | High sensitivity roller lever type & non-directional type | In total travel position | | | | | | | | | |
| | Models other than the above | In free and total travel positions | | | | | | | | | |
| Contact opening for 1 ms max. in free and total travel positions | | | | | | | | | | | |
| Allowable operating speed | Model | Other than on the right | 1LS19-J | 2LS1-J | 2LS-J6 | 3LS1-J | 5LS1-J/5LS7-J | 8LS3-J | 8LS125-J | 8LS152-J | |
| | Max. | 0.5 m/s | 0.5 m/s | 0.5 m/s | 0.2 m/s | 0.3 m/s | 0.5 m/s | 0.5 m/s | 0.3 m/s | 0.3 m/s | |
| | Min. | 1.7 mm/s | 0.4 mm/s | 1.0 mm/s | 1.0 mm/s | 0.5 mm/s | 0.2 mm/s | 10 mm/s | 50 mm/s | 20 mm/s | |
| At max. speed, actuator is not damaged. At min. speed, contact instability lasts 0.1 s max. | | | | | | | | | | | |
| Operating frequency | Light operation roller lever/ heat-resistant/ cold-resistant: max. 60 operations/minute, Models other than the above: max. 120 operations/minute | | | | | | | | | | |
| Cable pullout strength | Min. 100 N | | | | | | | | | | |
| Life | Model | Other than on the right | 1LS-J50, 2LS-J6, cold-resistant type | 3LS1-J | | | 6LS□J, heat-resistant type | | | | |
| | Life | Min. 10 million operations | Min. 1 million operations | | Min. 5 million operations | | | Min. 2 million operations | | | |
| | (At 70% to 100% of the rated overtravel.) | | | | | | | | | | |
| Electrical life | Model | Standard load built-in switch | | | | Standard load double seal built-in switch | | | Low current load built-in switch | | |
| | Life | Min. 500,000 operations at rated load | | Min. 200,000 operations at rated load | | | Min. 2 million operations at rated load | | | | |
| Operating frequency: Above conditions must be satisfied at 20 operations/minute. | | | | | | | | | | | |
| Ambient operating conditions | Temperature | Standard model (standard load and low current load) : -10 to +70 °C (freezing not allowed) | | | | | | | | | |
| | | Double seal type : 1LS19-JS: 0 to +70 °C (freezing not allowed) 2LS, 3LS, 5LS, 8LS125-JS: +5 to +70 °C (freezing not allowed) | | | | | | | | | |
| | | Double seal type other than above: -5 to +70 °C (freezing not allowed) | | | | | | | | | |
| | | Heat-resistant type : -10 to +120 °C (freezing not allowed) Cold-resistant type : -40 to +70 °C (freezing not allowed) | | | | | | | | | |
| Humidity | Max. 98% RH*3 | | | | | | | | | | |
| Recommended tightening torque | Body | Front: 5 to 6 N·m (M5 hexagon socket head cap screw). Back: 5 to 6 N·m (M6 screws) | | | | | | | | | |
| | Lever | 4 to 5.2 N·m (M5 hexagon socket head bolt) | | | | | | | | | |
| | Terminal | 1.0 to 1.4 N·m (M4 binding head machine screw) | | | | | | | | | |
| | Cover | 1.3 to 1.7 N·m (M4 small round head screw) | | | | | | | | | |
| | Head | 0.8 to 1.2 N·m (M3.5 small round head screw) | | | | | | | | | |
| | Cap nut | 2 to 3 N·m (M22 screw for 3LS) | | | | | | | | | |
| | Piano wire lever | 0.6 to 0.8 N·m (M3 hexagon head set screw) | | | | | | | | | |
| Connector tightening torque | 0.4 to 0.6 N·m (M12 ring) | | | | | | | | | | |

Notes: Mechanical performance values for the roller lever type are for lever length of 38.1 mm.

*1. Some models do not fall under this category. *2. EN 60947-5-1 and GB 14048.5-2001 applies only to G-type products with a ground terminal. *3. Max. 95% RH for connector and preleaded connector types

● Contact type 2-circuit double break



PHOTOELECTRIC SENSORS & SWITCHES

MEASUREMENT SENSORS

PROXIMITY SWITCHES

LIMIT SWITCHES

SAFETY KEY SWITCHES

LIMIT SWITCHES WITH POSITIVE OPENING MECHANISM

GENERAL PURPOSE LIMIT SWITCHES

TECHNICAL GUIDE FOR LIMIT SWITCHES

EXPLOSION-PROOF SWITCHES

TECHNICAL GUIDE FOR EXPLOSION-PROOF SWITCHES

STANDARD □LS□

SPATTER-GUARDED □LS□□

1LS-J7□□

1LS-J8□□

1LS□J401

VCL□□□

SL1□□□

SL1□□C












Connector with cable



See page F-001

ORDER GUIDE

● Switch body (contact your dealer for models not listed in the following table)

| Actuator | | Operating characteristics | | | Basic catalog listing | Options | | | |
|--------------------------------|---|--------------------------------|--------------------------|-----------------------------|-----------------------|--|-------------------------------------|------------------|-----------|
| | | Max. O.F. (operating force) | Max. P.T. (pretravel) | Min. T.T. (total travel) | | With LED lamp, 12 to 125 Vac/dc EC | With neon lamp, 100/200 Vac E | Double seal S | |
| Name | Shape | | | | | | | | |
| Roller lever |  | 13.4 N | Standard model 20° | Standard travel50° | 1LS1-J | 1LS1-JEC | 1LS1-JE | 1LS1-JS | |
| | | | High sensitivity 5° | Standard travel50° | 1LS19-J | 1LS19-JEC | 1LS19-JE | 1LS19-JS | |
| | | 8.9 N | Standard model 20° | High overtravel80° | 1LS-J500 | 1LS-J500EC | 1LS-J500E | 1LS-J500S | |
| | | | High sensitivity 10° | High overtravel80° | 1LS-J550 | 1LS-J550EC | 1LS-J550E | 1LS-J550S | |
| | | | Standard model 30° | High overtravel90° | 1LS-J50 | 1LS-J50EC | 1LS-J50E | 1LS-J50S | |
| Adjustable roller lever*1 |  | 13.4 N | Standard model 20° | Standard travel50° | 1LS3-J | 1LS3-JEC | 1LS3-JE | 1LS3-JS | |
| | | 8.9 N | Standard model 20° | High overtravel80° | 1LS-J503 | 1LS-J503EC | 1LS-J503E | 1LS-J503S | |
| | | | High sensitivity 10° | High overtravel80° | 1LS-J553 | 1LS-J553EC | 1LS-J553E | 1LS-J553S | |
| Light operation rod lever*2 |  | 1.4 N | Standard model 20° | Standard travel50° | 1LS10-J | 1LS10-JEC | 1LS10-JE | 1LS10-JS | |
| Lever-less type |  | 13.4 N *1 | Standard model 20° | Standard travel50° | 1LS2-J | 1LS2-JEC | 1LS2-JE | 1LS2-JS | |
| | | | High sensitivity 5° | Standard travel50° | 1LS9-J | 1LS9-JEC | — | — | |
| | | 8.9 N *1 | Standard model 20° | High overtravel80° | 1LS-J501 | 1LS-J501EC | 1LS-J501E | 1LS-J501S | |
| | | | High sensitivity 10° | High overtravel80° | 1LS-J551 | 1LS-J551EC | 1LS-J551E | 1LS-J551S | |
| | | | Standard model 30° | High overtravel90° | 1LS-J51 | 1LS-J51EC | 1LS-J51E | 1LS-J51S | |
| | | 1.4 N *2 | Standard model 20° | Standard travel50° | 1LS23-J | — | 1LS23-JE | — | |
| Plunger |  | 26.7 N | 1.7 mm | 8.1 mm | 2LS1-J | 2LS1-JEC | 2LS1-JE | 2LS1-JS | |
| Ball plunger |  | 26.7 N | 1.7 mm | 5.7 mm | 2LS-J6 | 2LS-J6EC | 2LS-J6E | — | |
| Side roller plunger |  | 40.1 N | 2.77 mm | 8.4 mm | 3LS1-J | 3LS1-JEC | 3LS1-JE | 3LS1-JS | |
| Roller plunger |  | 26.7 N | 1.7 mm | 7.3 mm | 5LS1-J | 5LS1-JEC | 5LS1-JE | 5LS1-JS | |
| Boot seal roller plunger |  | 15.7 N | 1.7 mm | 7.3 mm | 5LS7-J | 5LS7-JEC | 5LS7-JE | 5LS7-JS | |
| Fork lever lock |  | 8.9 N | 60° | 90° | 6LS1-J | 6LS1-JEC | 6LS1-JE | 6LS1-JS | |
| | | 8.9 N | 60° | 90° | 6LS3-J | 6LS3-JEC | 6LS3-JE | 6LS3-JS | |
| Non-directional operation type |  | Spring rod | 1.4 N | 28.6 mm | — | 8LS3-J | 8LS3-JEC | 8LS3-JE | 8LS3-JS |
| | | Steel wire light operation | 0.28 N | 55 mm | — | 8LS125-J | 8LS125-JEC | 8LS125-JE | 8LS125-JS |
| | | Coil spring | 1.4 N | 28.6 mm | — | 8LS152-J | 8LS152-JEC | 8LS152-JE | 8LS152-JS |

*1. Values are for lever length of 38.1 mm.

*2. Values are for lever length of 141.2 mm.

UL/CSA/GB (ccc marking) approved products




UL/CSA/CE/GB-approved products

All catalog listing are GB approved products.




| Options | | | | | | | | |
|-----------------------------|----------------------------------|--------------------------|--|---|---|----------------------------------|-----------------------------|-----------------------------|
| Double seal + LED SEC | Double seal + neon lamp SE | Low current load K | EN/GB-compliant with GND terminal G | EN/GB-compliant with GND + LED GEC | EN/GB-compliant with GND + LED & dbl seal SGEC | Corrosion-resistant type M | Heat-resistant type H | Cold-resistant type L |
| 1LS1-JSEC | 1LS1-JSE | 1LS1-JK | 1LS1-JG | 1LS1-JGEC | 1LS1-JSGEC | 1LS1-JM | 1LS1-JH | 1LS1-JL |
| 1LS19-JSEC | 1LS19-JSE | 1LS19-JK | 1LS19-JG | 1LS19-JGEC | 1LS19-JSGEC | 1LS19-JM | 1LS19-JH | 1LS19-JL |
| 1LS-J500SEC | 1LS-J500SE | 1LS-J500K | 1LS-J500G | 1LS-J500GEC | 1LS-J500SGEC | 1LS-J500M | 1LS-J500H | 1LS-J500L |
| 1LS-J550SEC | 1LS-J550SE | 1LS-J550K | 1LS-J550G | 1LS-J550GEC | 1LS-J550SGEC | 1LS-J550M | 1LS-J550H | — |
| 1LS-J50SEC | — | 1LS-J50K | 1LS-J50G | 1LS-J50GEC | 1LS-J50SGEC | — | 1LS-J50H | — |
| 1LS3-JSEC | 1LS3-JSE | 1LS3-JK | 1LS3-JG | 1LS3-JGEC | 1LS3-JSGEC | 1LS3-JM | 1LS3-JH | 1LS3-JL |
| 1LS-J503SEC | 1LS-J503SE | 1LS-J503K | 1LS-J503G | 1LS-J503GEC | 1LS-J503SGEC | 1LS-J503M | 1LS-J503H | 1LS-J503L |
| 1LS-J553SEC | — | 1LS-J553K | 1LS-J553G | 1LS-J553GEC | 1LS-J553SGEC | — | — | — |
| 1LS10-JSEC | 1LS10-JSE | 1LS10-JK | 1LS10-JG | 1LS10-JGEC | 1LS10-JSGEC | — | — | — |
| — | — | — | — | 1LS2-JGEC | 1LS2-JSGEC | 1LS2-JM | 1LS2-JH | — |
| — | — | 1LS9-JK | — | 1LS9-JGEC | 1LS9-JSGEC | — | — | — |
| — | — | 1LS-J501K | — | 1LS-J501GEC | 1LS-J501SGEC | — | — | 1LS-J501L |
| 1LS-J551SEC | — | — | — | 1LS-J551GEC | 1LS-J551SGEC | — | — | — |
| — | — | 1LS-J51K | — | 1LS-J51GEC | 1LS-J51SGEC | — | — | 1LS-J51L |
| — | — | — | — | — | — | — | — | — |
| 2LS1-JSEC | 2LS1-JSE | 2LS1-JK | 2LS1-JG | 2LS1-JGEC | 2LS1-JSGEC | 2LS1-JM | 2LS1-JH | — |
| 2LS-J6SEC | 2LS-J6SE | 2LS-J6K | 2LS-J6G | 2LS-J6GEC | 2LS-J6SGEC | — | — | — |
| 3LS1-JSEC | 3LS1-JSE | 3LS1-JK | 3LS1-JG | 3LS1-JGEC | 3LS1-JSGEC | — | — | 3LS1-JL |
| 5LS1-JSEC | 5LS1-JSE | 5LS1-JK | 5LS1-JG | 5LS1-JGEC | 5LS1-JSGEC | — | 5LS1-JH | 5LS1-JL |
| 5LS7-JSEC | 5LS7-JSE | 5LS7-JK | 5LS7-JG | 5LS7-JGEC | 5LS7-JSGEC | — | — | — |
| 6LS1-JSEC | 6LS1-JSE | 6LS1-JK | 6LS1-JG | 6LS1-JGEC | 6LS1-JSGEC | — | — | — |
| 6LS3-JSEC | — | 6LS3-JK | 6LS3-JG | 6LS3-JGEC | 6LS3-JSGEC | — | — | — |
| 8LS3-JSEC | — | 8LS3-JK | 8LS3-JG | 8LS3-JGEC | 8LS3-JSGEC | — | 8LS3-JH | — |
| 8LS125-JSEC | 8LS125-JSE | 8LS125-JK | — | 8LS125-JGEC | 8LS125-JSGEC | — | — | — |
| 8LS152-JSEC | 8LS152-JSE | 8LS152-JK | — | 8LS152-JGEC | 8LS152-JSGEC | — | — | 8LS152-JL |

● Connector type switch body

| Actuator | | Operating characteristics | | | Options | | | |
|--------------------------|---|--------------------------------|--------------------------|-----------------------------|----------------------------|--|---|---|
| | | Max. O.F. (operating) force | Max. P.T. (pretravel) | Min. T.T. (total travel) | Connector +LED EC-PD | Preleaded connector +LED EC-PD03 | Connector+ double seal+LED SEC-PD | Preleaded connector* +dbl seal+LED SEC-PD03 |
| Name | Shape | | | | | | | |
| Roller lever |  | 13.4 N | Standard model 20° | Standard travel 50° | 1LS1-JEC-PD | 1LS1-JEC-PD03 | 1LS1-JSEC-PD | 1LS1-JSEC-PD03 |
| | | | High sensitivity 5° | Standard travel 35° | 1LS19-JEC-PD | 1LS19-JEC-PD03 | 1LS19-JSEC-PD | 1LS19-JSEC-PD03 |
| | | 8.9 N | Standard model 20° | High overtravel 75° | 1LS-J500EC-PD | 1LS-J500EC-PD03 | 1LS-J500SEC-PD | 1LS-J500SEC-PD03 |
| | | | High sensitivity 10° | High overtravel 75° | 1LS-J550EC-PD | 1LS-J550EC-PD03 | 1LS-J550SEC-PD | 1LS-J550SEC-PD03 |
| Roller plunger |  | 26.7 N | 1.7 mm | 7.3 mm | 5LS1-JEC-PD | 5LS1-JEC-PD03 | 5LS1-JSEC-PD | 5LS1-JSEC-PD03 |
| Boot seal roller plunger |  | 15.7 N | 1.7 mm | 7.3 mm | 5LS7-JEC-PD | 5LS7-JEC-PD03 | 5LS7-JSEC-PD | 5LS7-JSEC-PD03 |


*(UL/CSA(C-UL) approved products)

● Quick Lock type


| Actuator | | Operating characteristics | | | Options | |
|--------------|---|--------------------------------|--------------------------|-----------------------------|---|---|
| | | Max. O.F. (operating) force | Max. P.T. (pretravel) | Min. T.T. (total travel) | Preleaded connector* +LED EC-SD03 | Connector+ double seal+LED SEC-SD03 |
| Name | Shape | | | | | |
| Roller lever |  | 13.4 N | Standard model 20° | Standard travel 50° | 1LS1-JEC-SD03 | 1LS1-JSEC-SD03 |
| | | | High sensitivity 5° | Standard travel 50° | 1LS19-JEC-SD03 | 1LS19-JSEC-SD03 |
| | | 8.9 N | Standard model 20° | High overtravel 80° | 1LS-J500EC-SD03 | 1LS-J500SEC-SD03 |
| | | | High sensitivity 10° | High overtravel 80° | 1LS-J550EC-SD03 | 1LS-J550SEC-SD03 |

*(UL/CSA(C-UL) approved products)

Compatible with OMRON Smartclick connectors.

Smartclick  Smartclick is a registered trademark of OMRON Corporation.

● Resin filled type



- Double-seal type has a sealed internal switch
- Places where coolant might seep, like the body cover and conduit, are filled with epoxy resin.
- Resin filling plus an ultra long life limit switch, for enhanced reliability.

| | | PT | TT | Base catalog listing | Catalog listing | | | |
|--------------|--------------------------|----------------------|--------|----------------------|-------------------------------------|-------------------------------|---|---------------------|
| | | | | | DC preleaded connector, 30 cm + LED | DC preleaded connector, 30 cm | Preleaded connector with 4 assignable pins, 30 cm + LED | Preleaded, 5 m +LED |
| Standard LS | Roller lever | Standard model 20° | 80° | 1LS-J500 | 1LS-J500SEC-MD03 | 1LS-J500S-MD03 | 1LS-J500SEC-MP03 | 1LS-J500SEC-N35 |
| | | High sensitivity 10° | 80° | 1LS-J550 | 1LS-J550SEC-MD03 | 1LS-J550S-MD03 | 1LS-J550SEC-MP03 | 1LS-J550SEC-N35 |
| | Roller plunger | 1.7 mm | 7.3 mm | 5LS1-J | 5LS1-JSEC-MD03 | 5LS1-JS-MD03 | 5LS1-JSEC-MP03 | 5LS1-JSEC-N35 |
| | Boot seal roller plunger | 1.7 mm | 7.3 mm | 5LS7-J | 5LS7-JSEC-MD03 | 5LS7-JS-MD03 | 5LS7-JSEC-MP03 | 5LS7-JSEC-N35 |
| Long life LS | Roller lever | Standard model 20° | 50° | 1LS-J700 | 1LS-J700SEC-MD03 | 1LS-J700S-MD03 | 1LS-J700SEC-MP03 | 1LS-J700SEC-N35 |
| | | High sensitivity 5° | 50° | 1LS-J710 | 1LS-J710SEC-MD03 | 1LS-J710S-MD03 | 1LS-J710SEC-MP03 | 1LS-J710SEC-N35 |
| | | Standard model 20° | 80° | 1LS-J720 | 1LS-J720SEC-MD03 | 1LS-J720S-MD03 | 1LS-J720SEC-MP03 | 1LS-J720SEC-N35 |
| | | High sensitivity 10° | 80° | 1LS-J730 | 1LS-J730SEC-MD03 | 1LS-J730S-MD03 | 1LS-J730SEC-MP03 | 1LS-J730SEC-N35 |

Note: Specifications and dimensions are the same as those of the base catalog listing.



ELECTRICAL RATING

●2-circuit double break

| Indicator type | None | | 100/200 Vac with neon lamp | | 12 to 125 Vac/dc with LED lamp | |
|--|--|---|---|-------------------|--|-----------------------------|
| Model | Catalog listing | Electrical rating | Catalog listing | Electrical rating | Catalog listing | Electrical rating |
| General-purpose | <input type="checkbox"/> LS <input type="checkbox"/> -J | 125, 250, 480 Vac 10A 125 Vac 1/2HP 250 Vac 1HP 125 Vdc 0.8A 250 Vdc 0.4A | <input type="checkbox"/> LS <input type="checkbox"/> -JE | 125, 250 Vac 5A | <input type="checkbox"/> LS <input type="checkbox"/> -JEC | 125 Vac 5A 125 Vdc 0.8A |
| General-purpose, double seal | <input type="checkbox"/> LS <input type="checkbox"/> -JS | 125, 250 Vac 5A 125 Vac 1/8HP 250 Vac 1/4HP 125 Vdc 0.8A 250 Vdc 0.4A | <input type="checkbox"/> LS <input type="checkbox"/> -JSE | 125, 250 Vac 5A | <input type="checkbox"/> LS <input type="checkbox"/> -JSEC | 125 Vac 5A 125 Vdc 0.8A |
| General-purpose, gold plated contacts | <input type="checkbox"/> LS <input type="checkbox"/> -JK | 125 Vac 0.1A 30 Vdc 0.1A | <input type="checkbox"/> LS <input type="checkbox"/> -JKE | 125 Vac 0.1A | <input type="checkbox"/> LS <input type="checkbox"/> -JKEC | 125 Vac 0.1A 30 Vdc 0.1A |
| General-purpose (high sensitivity) | 1LS19-J 1LS-J55 <input type="checkbox"/> | 125, 250, 480 Vac 10A 125 Vac 1/8HP 250 Vac 1/4HP 125 Vdc 0.4A 250 Vdc 0.2A | 1LS19-JE 1LS-J55 <input type="checkbox"/> E | 125, 250 Vac 5A | 1LS19-JEC 1LS-J55 <input type="checkbox"/> EC | 125 Vac 5A |
| General-purpose (high sensitivity), dbl seal | 1LS19-JS 1LS-J55 <input type="checkbox"/> S | 125, 250 Vac 5A 125 Vac 1/8HP 250 Vac 1/4HP | 1LS19-JSE 1LS-J55 <input type="checkbox"/> SE | 125, 250 Vac 5A | 1LS19-JSEC 1LS-J55 <input type="checkbox"/> SEC | 125 Vac 5A |
| General-purpose, DC connector/ preleaded connector | — | — | — | — | <input type="checkbox"/> LS <input type="checkbox"/> -JEC-PD <input type="checkbox"/> LS <input type="checkbox"/> -JEC-PD03 | 30 Vdc 3A |
| General-purpose, AC connector/ preleaded connector | — | — | — | — | <input type="checkbox"/> LS <input type="checkbox"/> -JEC-PA <input type="checkbox"/> LS <input type="checkbox"/> -JEC-PA03 | 125 Vac 3A 30 Vdc 3A |

●UL electrical ratings

| | | Electrical rating | Load | No. of cycles |
|---|----|-------------------|------------|---------------|
| 1LS1-J No indicator lamp | Ag | A300 | Pilot Duty | 6,000 |
| | | 3 A, DC 30 V | DC General | 6,000 |
| | Au | 0.4 A, DC 125 V | DC General | 6,000 |
| | | 0.1 A, AC 125 V | AC General | 6,000 |
| 1LS1-JEC With a neon lamp | Ag | A300 | Pilot Duty | 6,000 |
| | | 0.1 A, AC 125 V | AC General | 6,000 |
| | Au | B150 | Pilot Duty | 6,000 |
| | | 0.1 A, DC 30 V | DC General | 6,000 |
| 1LS1-JEC With an LED | Ag | 3 A, DC 30 V | DC General | 6,000 |
| | | 0.4 A, DC 125 V | DC General | 6,000 |
| | Au | 0.1 A, AC 125 V | AC General | 6,000 |
| | | 0.1 A, DC 30 V | DC General | 6,000 |
| 1LS1-JE7-PD With an LED (with a connector/connector and cable) | Ag | 3 A, DC 30 V | DC General | 6,000 |
| | Au | 0.1 A, DC 30 V | DC General | 6,000 |

Enclosure: Type 1

Maximum allowable ambient temperature: 40 °C

●EN/GB-compliant model ratings (G type, with ground terminal)

| | Application category | Rating | Rated thermal current (I _{th}) |
|-----------------------|----------------------|--------------|--|
| Standard load type | AC-15 | 3.0A 240 Vac | 10A |
| | DC-12 | 0.4A 30 Vdc | 10A |
| Low current load type | AC-12 | 0.1A 125 Vac | 1A |
| | DC-12 | 0.1A 30 Vdc | 1A |



●Reference rating (Ratings fluctuate according to the operating environment and type of load. Verify values on an actual operating unit.)

| AC rating | 125 Vac | | | | 250 Vac | | | | 480 Vac | |
|--------------------------|------------|-----------|----------------|-----------|------------|-----------|----------------|-----------|------------|-----------|
| Typical model: 1LS1-J | Resistance | Induction | Electric motor | | Resistance | Induction | Electric motor | | Resistance | Induction |
| | | | N.C. | N.O. | | | N.C. | N.O. | | |
| | 10 | 6 | 4 | 2 | 10 | 6 | 3 | 1.5 | 6 | 4 |
| DC rating | 8 Vdc | | 14 Vdc | | 30 Vdc | | 115 Vdc | | 230 Vdc | |
| Typical model: 1LS1-J | Resistance | Induction | Resistance | Induction | Resistance | Induction | Resistance | Induction | Resistance | Induction |
| | 10 | 6 | 10 | 6 | 6 | 4 | 0.8 | 0.2 | 0.4 | 0.1 |

Note: "Induction" refers to a load having a power factor of 0.4 and time constant of 7 ms (DC). "Electric motor" refers to a load having a value of six times the inrush current.

LIFE VS. LOAD CURRENT CHARACTERISTICS

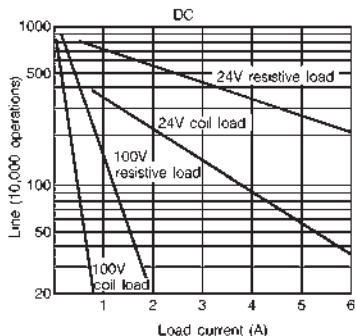





1LS-J/5LS-J




CONNECTORS

LS Series connectors

Models (e.g. 2LS-J, 8LS-J) for which a complete model No. is not given can be modified into the connector type by attaching the separate parts indicated below to a standard LS Series body.

| Catalog listing | Name | Appearance | Power supply | Number of leads | | Pin layout |
|-----------------|--|---|--------------|-----------------|---------|--|
| | | | | 2 leads | 4 leads | |
| LS-PA5A2 | PA5 Series sealed connector with cable |   2-lead type 4-lead type | AC | ○ | — |  Black White |
| LS-PA5A4 | | | | — | ○ |  Green Red |
| LS-PA5D2 | | | DC | ○ | — |  Black White |
| LS-PA5D4 | | | | — | ○ |  Black White |

Assembly method

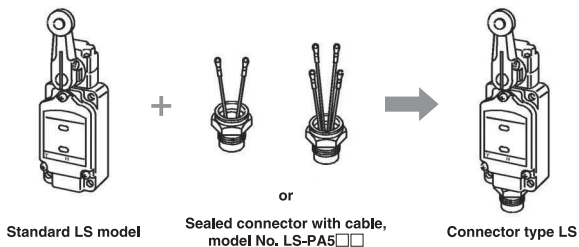


Wiring method

2-lead type: catalog listing LS-PA5



4-lead type: catalog listing LS-PA5



| Connector | | Internal switch |
|-------------|------------|-----------------|
| Contact No. | Lead color | Terminal No. |
| 1 | — | — |
| 2 | — | — |
| 3 | Black | NO.3 |
| 4 | White | NO.4 |

| Connector | | Internal switch |
|-------------|------------|-----------------|
| Contact No. | Lead color | Terminal No. |
| 1 | Red | NO.1 (N.C.) |
| 2 | Green | NO.2 (N.C.) |
| 3 | Black | NO.3 (N.O.) |
| 4 | White | NO.4 (N.O.) |

*Even in an N.C. wiring connection, N.C. contact assignments are Nos. 3 and 4.




●Preleaded connector for LS Series


Models (e.g. 2LS□-J□, 8LS□-J) for which a complete model No. is not given can be modified into the preleaded connector type by attaching the separate parts indicated below to a standard LS Series body.

| Catalog listing | Name | Appearance | Power supply | Cable length | Number of leads |
|-----------------|-------------------------------|------------|--------------|--------------|-----------------|
| PA5-4IBX03HK4-E | PA5 Series connector cable | | DC | 30 cm | 4 |
| PA5-4JBX03HK4-E | | | AC | | |
| PA1-A10PF | Sealed connector | | — | — | — |

Assembly method

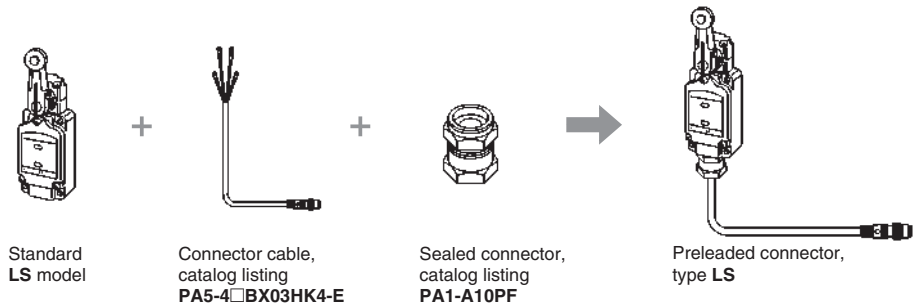


Wiring method




CONNECTOR WITH CABLE











Model PA5 connectors for connector-type limit switches

| Appearance | Power supply | Cable features | Cable length | Catalog listing | Lead color |
|---|--------------|--|--------------|-----------------|---------------------------------------|
|  | DC | Vinyl-insulated cord with high resistance to oil and vibration (UL/NFPA79 CM, CL3) | 2 m | PA5-4ISX2SK | 1: brown, 2: white, 3: blue, 4: black |
| | | | 5 m | PA5-4ISX5SK | 1: brown, 2: white, 3: blue, 4: black |
| | AC | | 2 m | PA5-4JSX2SK | 1: brown, 2: white, 3: blue, 4: black |
| | | | 5 m | PA5-4JSX5SK | 1: brown, 2: white, 3: blue, 4: black |

Contact pin layout and lead color

Preleaded connector type




| Connector cable | Connector appearance | | Pin layout | | | |
|---------------------------|---|--|---|--|---|---|
| | | | Without indicator lamp | With LED indicator lamp | With neon indicator lamp | Lead colors |
| AC cable: -PA -PA03 | Switch side (male)  | Connector side (female)  |  |  |  | 1: brown (N.C.) 2: white (N.C.) 3: blue (N.O.) 4: black (N.O.) |
| DC cable: -PD -PD03 | Switch side (male)  | Connector side (female)  |  |  |  | |

Note: The shape of the connector plugs and sockets is different for AC and DC cables, which are not mutually compatible.

The contact assignments of limit switches comply with Nippon Electric Control Equipment Industries Association standards (NECA 4202).


Tightening the connector


Align the grooves and rotate the fastening nut on the PA5 connector by hand until it fits tightly with the connector on the switches side.

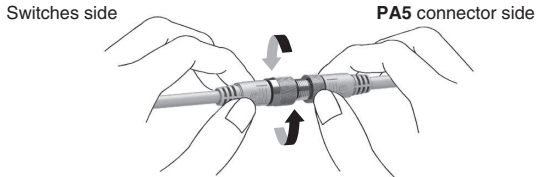

Be sure to use a Model PA7 connector with cable when connecting Quick Lock type switch.


Model PA7 connector with cable

| Shape | Power supply | Cord properties | Cord length | Catalog listing | Lead colors |
|---|--------------|---|-------------|-----------------|---------------------------------------|
|  | DC | Vinyl-insulated cord with high resistance to oil and vibration (UL/NFPA79 CM) | 2 m | PA7-4ISX2SK | 1: brown, 2: white, 3: blue, 4: black |
| | | | 5 m | PA7-4ISX5SK | 1: brown, 2: white, 3: blue, 4: black |

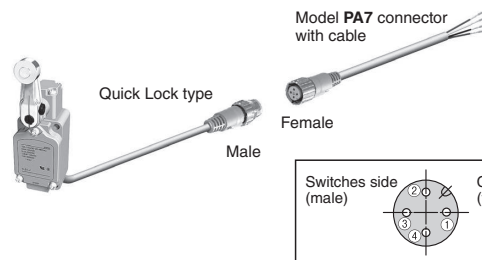

Tightening the connector

Align the triangle mark and mate the male and female connector then rotate 45 degree to match the keys on the rings by hand.

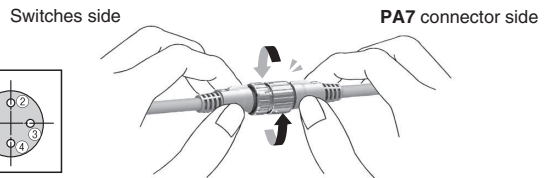

Compatible with OMRON Smartclick connectors.

Smartclick is a registered trademark of OMRON Corporation.

● Connector section specifications^{*1}

| Item | | Preleaded connector type | Quick Lock connector type |
|-------------------------------------|--|---|---|
| Operating voltage/ current range | For AC type | Min. 5V 5 mA. Max. 250 Vac 3A. | |
| | For DC type | Min. 5V 5 mA. Max. 125 Vdc 3A. | |
| Insulation resistance | | Min. 100 MΩ (by 500 Vdc megger) | Min. 50 MΩ (by 500 Vdc megger) |
| Dielectric strength | | 1,500 Vac for 1 minute (between contacts, and between contacts and connector housing) | |
| Initial contact resistance | | Max. 40 mΩ (when 3A current is supplied to connected male and female connectors. Semiconductor lead-specific resistance not included) | |
| Mating/unmating force | | 0.4 to 4.0 N per contact | |
| Mating cycles | | 50 | |
| Connector nut tightening torque | | Max. 0.8 N·m ² | |
| Cable pullout strength | | Min. 100 N | |
| Vibration resistance | | 10 to 55 Hz, 1.5 mm peak-to-peak amplitude, 2 hours each in X, Y and Z directions | |
| Impact resistance | | 300 m/s ² , 3 times each in X, Y and Z directions | 980 m/s ² , 10 times each in X, Y and Z directions |
| Protective structure | | IP67 (IEC 529) | |
| Operating temperature | | -10 to +70°C (freezing not allowed) | |
| Storage temperature | | -20 to +80°C | |
| Operating humidity | | Max. 95% RH | |
| Material | Contact | Gold-plated brass | |
| | Contact holder | Glass-lined polyester resin | |
| | Housing | Polyester elastomer | |
| | Coupling | Brass (For DC, Ni-plated. For AC, orange coating) | |
| | O-ring | NBR (nitrile rubber) | |
| Recommended tightening torque | | 0.4 to 0.6 N·m | |
| Connector cable | Catalog listing | for DC | PA5-4ISX□SK ^{*3} |
| | | for AC | PA5-4JSX□SK ^{*3} |
| | Nominal cross-sectional area, No. of leads | | 0.5 mm ² , 4 leads |

*1. Specifications assume the use of a Azbil connector (PA5/PA7 Series), and apply to 2-circuit double break switches (general-purpose and ultra long-life types).

*2. Tighten firmly by hand. If the connector is not tightened firmly, IP67 protection may be lost, or the connector may come loose.

*3. The number corresponding to □ in the catalog listing indicates the cable length (2 = 2 m, and 5 = 5 m).

PHOTOELECTRIC
SENSORS &
SWITCHES

MEASUREMENT
SENSORS

PROXIMITY
SWITCHES

LIMIT
SWITCHES

SAFETY
KEY SWITCHES

LIMIT SWITCHES
WITH POSITIVE
OPENING MECHANISM

GENERAL PURPOSE
LIMIT SWITCHES

TECHNICAL GUIDE
FOR
LIMIT SWITCHES

EXPLOSION-PROOF
SWITCHES

TECHNICAL GUIDE FOR
EXPLOSION-PROOF
SWITCHES

STANDARD
□LS□

SPATTER-GUARDED
□LS□□

1LS-J7□□

1LS-J8□□

1LS□-J401

VCL-□□

SL1-□□

SL1-□C

Connector
with cable




See page
F-001


● Connector dimensions

Sealed connector with LS-PA5 2-lead cable


(unit: mm)

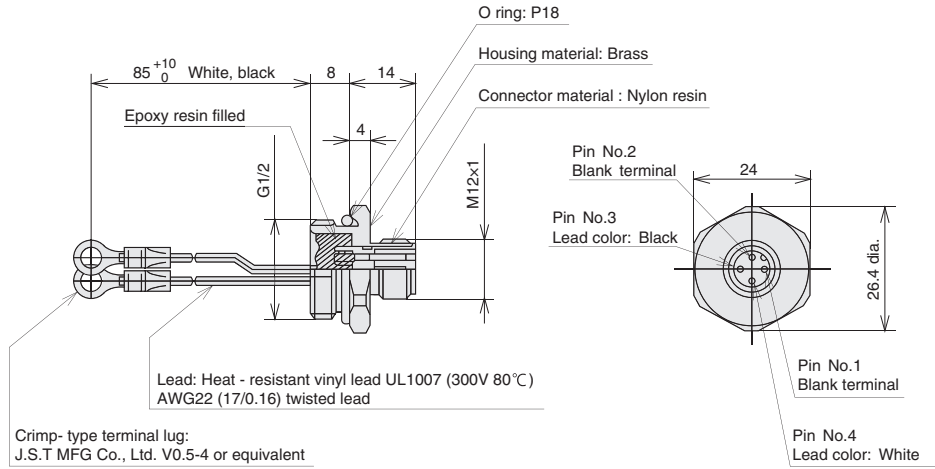


Sealed connector with LS-PA5 4-lead cable

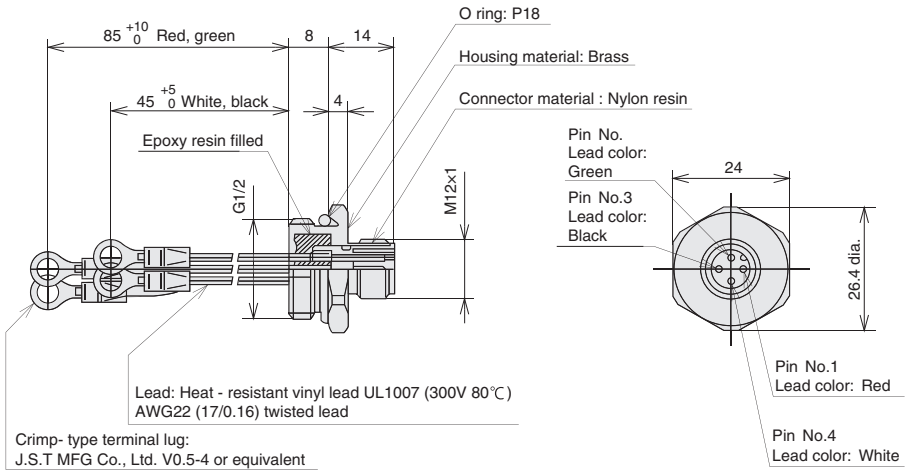






PA5-4 BX03HK4-E connector cable

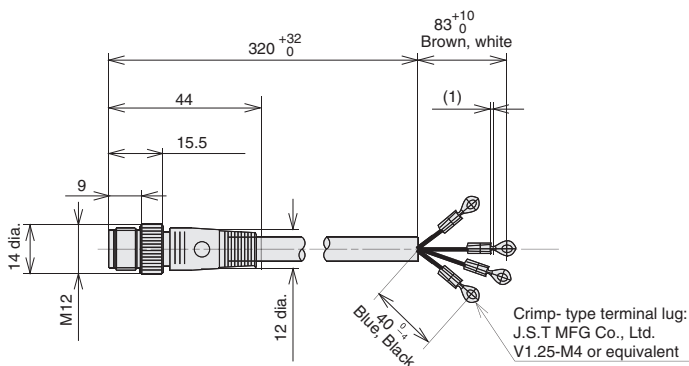

PA1-A10PF sealed connector




INDICATOR LAMP


| Option | Without indicator lamp | With 100/200 Vac neon lamp | With 12 to 125V LED lamp for AC or DC | |
|---|---|---|---|----------------------|
| Catalog listing | □LS□-J | □LS□-JE | □LS□-JEC | |
| Lamp cover front side | — |  |  | |
| Circuit diagrams |  |  |  | |
| Notes | — | Notes To ensure lighting of the neon lamp, use 75 Vac min. | Notes The voltage indicator lamp (red LED) is 12 to 125V. The indicator lamp operates on either AC or DC power. | |
| Lamp cover catalog listing (replacement part) | | LS-29PA1 | LS-29PAEC | |
| Specifications | Operating voltage | 100 to 200 Vac | | 12 to 125V, AC or DC |
| | | 100 Vac | 200 Vac | 12 to 125V |
| | Thermal current | Approx. 0.5 mA | Approx. 1.5 mA | Max. 0.6 mA |
| | Resistance | 100 kΩ | | 33 kΩ |

● Connection/operation of lamp cover

When set to light in FREE position




FREE position PUSHed (operating) position

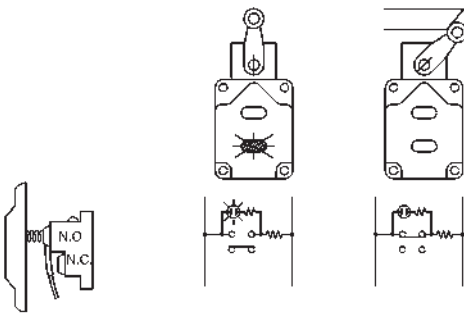


Series connection

Up to six switches can be connected in series when the power is 100V. Programmable controllers can also be connected in series. The brightness of the LED lamp is fixed regardless of the power, as light is generated by a built-in fixed current diode.
(Note that neon lamp type "E" Series switches cannot be connected in series at 100V.)

When set to light in PUSHed (operating) position (PUSH)



FREE position PUSHed (operating) position

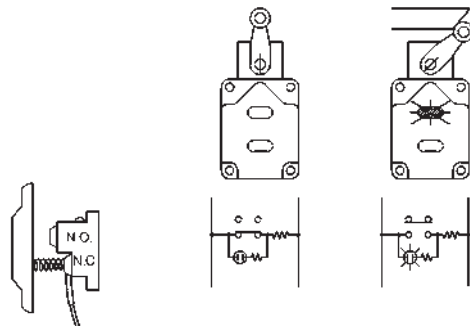

PC connection possible

The leakage current when the limit switch is not operating is 0.6 mA maximum. The PC will not malfunction due to dim lighting of the LED. Moreover, a fixed-current diode is built in to ensure fixed LED brightness regardless of the voltage.

APPEARANCE, OPERATING CHARACTERISTICS AND EXTERNAL DIMENSIONS

Roller lever type


(unit: mm)



Standard type
Heat-resistant type
Cold-resistant type



Corrosion-resistant
type

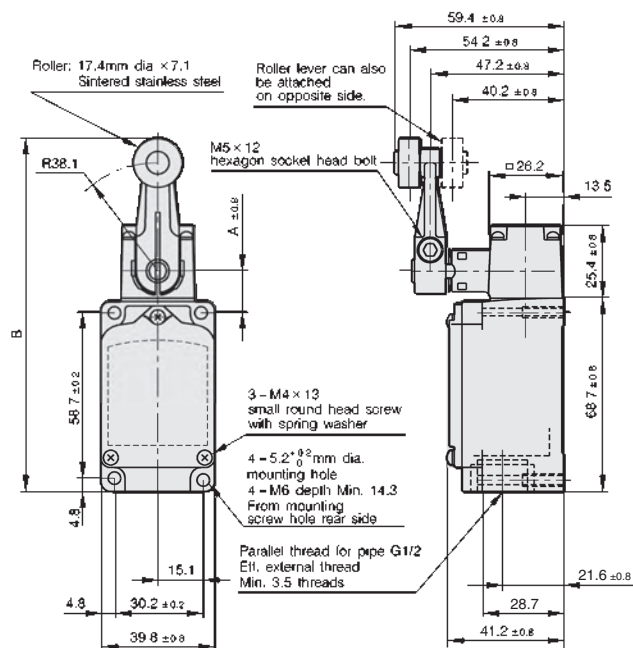


*Dimensional tolerance is ±0.4 unless otherwise specified.

| Catalog listing | 2-circuit double break | Standard type (-10 to +70°C) | 1LS1-J | 1LS19-J | 1LS-J500 | 1LS-J550 | 1LS-J50 |
|----------------------------------|---------------------------|---|--------------------------------------|--|--------------------------------------|------------------------------|----------|
| | | Heat-resistant type (-10 to +120°C) | 1LS1-JH | 1LS19-JH | 1LS-J500H | 1LS-J550H | 1LS-J50H |
| | | Cold-resistant type (-40 to +70°C) | 1LS1-JL | 1LS19-JL | 1LS-J500L | 1LS-J550L | — |
| | | Corrosion-resistant type (-10 to +70°C) ^{*1} | 1LS1-JM | 1LS19-JM | 1LS-J500M | 1LS-J550M | — |
| Operating characteristics | | Standard travel, standard characteristics | Standard travel, high sensitivity | High overtravel, standard characteristics | High overtravel, high sensitivity | High overtravel, 90° T.T. | |
| UL/CSA/GB | | ○ | | | | | — |
| O.F. | (Max. N) | 13.4 | | | 8.9 | | — |
| R.F. | (Min. N) | 2.2 | | | 0.98 | | 0.98 |
| P.T. | (Max. °) | 20 | 5 ⁺² ₀ | 20 | 10 ⁺² ₋₁ | 30 | |
| O.T. | (Min. °) | 30 | 30 | 55 | 62 | 60 | |
| M.D. | (Max. °) | 12 | 3 | 12 | 5 | 15 | |
| Section A dimensions | | 14.7±0.8 | | | | 17.2±0.8 | |
| Section B dimensions | | 125 ^{REF} | | | | 127.5 ^{REF} | |

Note *1. Exactly the same as 1LS1-J except for different lever shape. For details on the lever shape, see 6PA78-JM (page D-043, 044).


Adjustable roller lever type

(unit: mm)



| Catalog listing | Standard type | 1LS3-J | 1LS-J503 | 1LS-J553 |
|--------------------------------|---|---------------------------|-----------------------------------|----------|
| Heat-resistant (-10 to +120°C) | 1LS-JH | 1LS-J503H | — | — |
| Cold-resistant (-40 to +70°C) | 1LS3-JL | 1LS-J503L | — | — |
| Corrosion resistant | 1LS3-JM | 1LS-J503M | — | — |
| Operating characteristics | Standard travel, standard characteristics | High overtravel, standard | High overtravel, high sensitivity | |
| UL/CSA | ○(excluding types H, L) | | | |
| *O.F. (Max. N) | 13.4 | 8.9 | 8.9 | |
| *R.F. (Min. N) | 2.2 | 0.98 | 0.98 | |
| P.T. (Max. °) | 20 | 20 | 10 ⁺² ₋₁ | |
| O.T. (Min. °) | 30 | 55 | 62 | |
| M.D. (Max. °) | 12 | 12 | 5 | |

*At lever length of 38.1 mm.

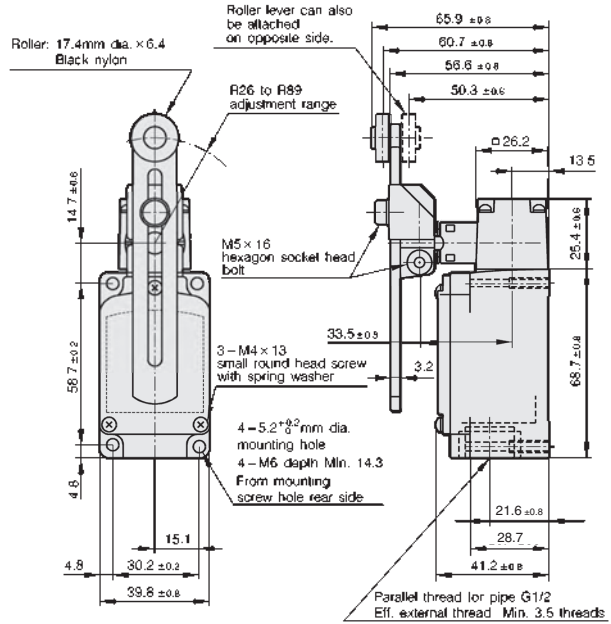

*Dimensional tolerance is ±0.4 unless otherwise specified.


Light operation rod lever type

(unit: mm)



| Catalog listing | 1LS10-J |
|---------------------------|---|
| Operating characteristics | Standard travel, Standard characteristics |
| UL/CSA | ○ |
| *O.F. (Max. N) | 1.4 |
| *R.F. (Min. N) | 0.27 |
| P.T. (Max. °) | 20 |
| O.T. (Min. °) | 30 |
| M.D. (Max. °) | 12 |

*At lever length of 141.2 mm.

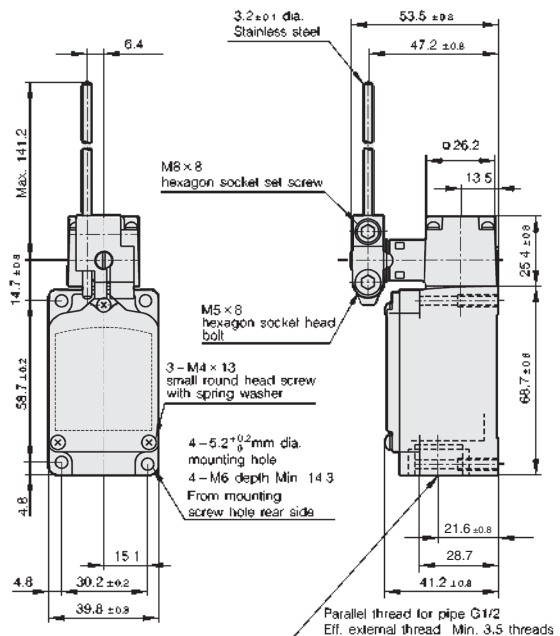

*Dimensional tolerance is ±0.4 unless otherwise specified.

PHOTOELECTRIC SENSORS & SWITCHES

MEASUREMENT SENSORS

PROXIMITY SWITCHES

LIMIT SWITCHES

SAFETY KEY SWITCHES

LIMIT SWITCHES WITH POSITIVE OPENING MECHANISM

GENERAL PURPOSE LIMIT SWITCHES

TECHNICAL GUIDE FOR LIMIT SWITCHES

EXPLOSION-PROOF SWITCHES

TECHNICAL GUIDE FOR EXPLOSION-PROOF SWITCHES

STANDARD
□LS□

SPATTER-GUARDED
□LS□□

1LS-J7□□

1LS-J8□□

1LS□-J401

VCL-□□

SL1-□□

SL1-□□

Connector with cable



See page F-001


Fork lever lock operation type

(unit: mm)



| Actuator type | Fork lever lock operation type | | |
|---|--------------------------------|------------------|-----------------|
| | Roller opposite side | Roller same side | No roller lever |
| Catalog listing | 6LS1-J | 6LS3-J | 6LS2-J |
| UL/CSA | | ○ | |
| O.F. (Max. N) | | 13.4 | |
| P.T. (Max. °) | | 60 | |
| O.T. (Min. °) | | 30 | |
| T.T. (°) | | 90±10 | |
| Mechanical reverse angle (° max) | | 55 | |

Note: Values for the lever-less type assume a lever length of 38.1 mm.

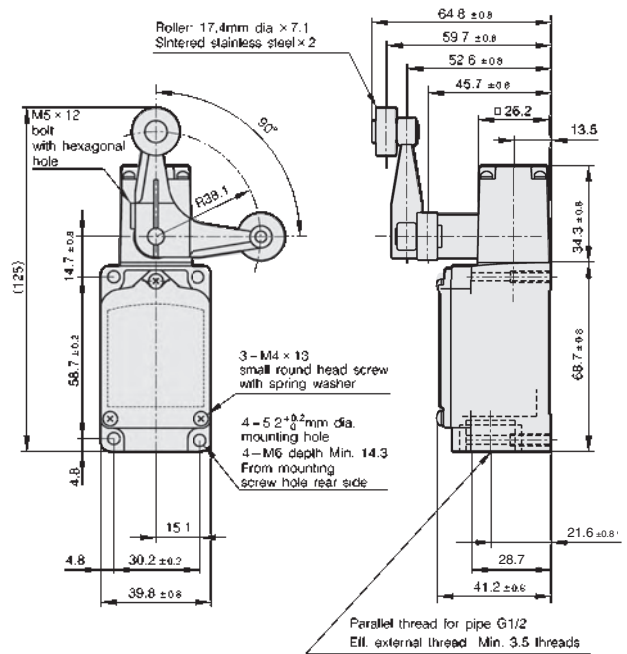


*Dimensional tolerance is ±0.4 unless otherwise specified.

Plunger type

(unit: mm)




| | | |
|-----------------------|--------------------------|-----------------------|
| Catalog listing | Standard type | 2LS1-J |
| | Heat-resistant | 2LS1-JH |
| | Corrosion-resistant type | 2LS1-JM |
| UL/CSA | | ○ (excluding types H) |
| O.F. (Max. N) | | 26.7 |
| R.F. (Min. N) | | 8.9 |
| P.T. (Max. mm) | | 1.7 |
| O.T. (Min. mm) | | 6.4 |
| M.D. (Max. mm) | | 0.51 |

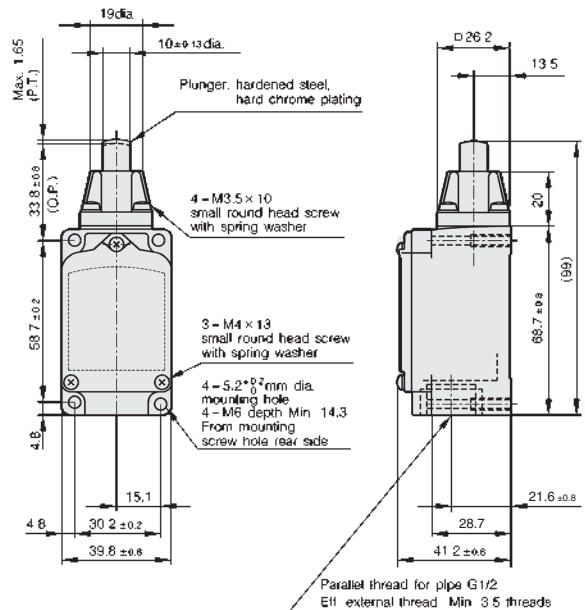

*Dimensional tolerance is ±0.4 unless otherwise specified.

Ball plunger type

(unit: mm)

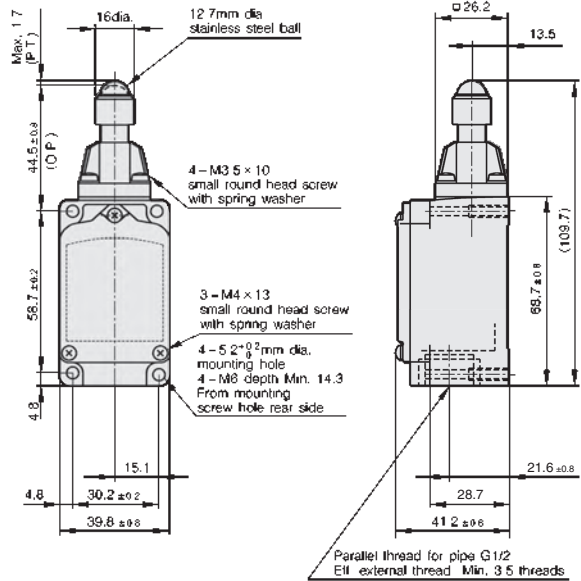


| | |
|-----------------|--------|
| Catalog listing | 2LS-J6 |
| UL/CSA | ○ |
| O.F. (Max. N) | 26.7 |
| R.F. (Min. N) | 8.9 |
| P.T. (Max. mm) | 1.7 |
| O.T. (Min. mm) | 4.0 |
| M.D. (Max. mm) | 0.51 |

*Dimensional tolerance is ±0.4 unless otherwise specified.

Roller plunger type

(unit: mm)

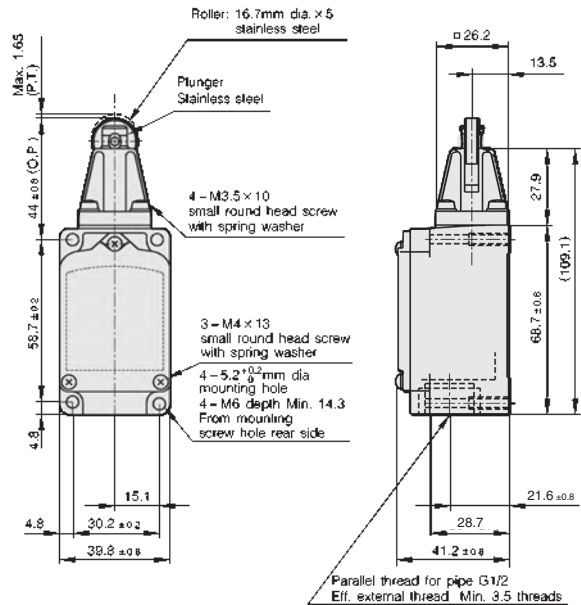

| | | |
|-----------------|-------------------------|---------|
| Catalog listing | Standard type | 5LS1-J |
| | Heat-resistant | 5LS1-JH |
| | Cold-resistant | 5LS1-JL |
| UL/CSA | ○(excluding types H, L) | |
| O.F. (Max. N) | 26.7 | |
| R.F. (Min. N) | 8.9 | |
| P.T. (Max. mm) | 1.7 | |
| O.T. (Min. mm) | 5.6 | |
| M.D. (Max. mm) | 0.51 | |

*Dimensional tolerance is ±0.4 unless otherwise specified.

PHOTOELECTRIC SENSORS & SWITCHES

MEASUREMENT SENSORS

PROXIMITY SWITCHES

LIMIT SWITCHES

SAFETY KEY SWITCHES

LIMIT SWITCHES WITH POSITIVE OPENING MECHANISM

GENERAL PURPOSE LIMIT SWITCHES

TECHNICAL GUIDE FOR LIMIT SWITCHES

EXPLOSION-PROOF SWITCHES

TECHNICAL GUIDE FOR EXPLOSION-PROOF SWITCHES

STANDARD

LS

SPATTER-GUARDED

LS

1LS-J7

1LS-J8

1LS-J401

VCL

SL1

SL1-C


Connector with cable



See page F-001

Boot seal roller plunger type

(unit: mm)

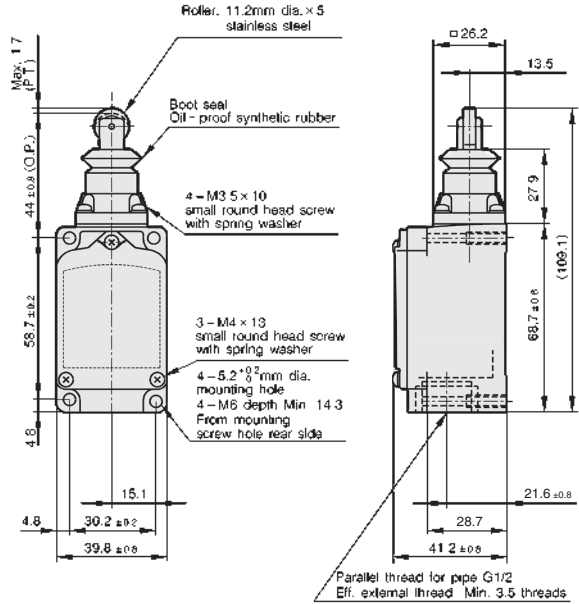


| Catalog listing | 5LS7-J | |
|-----------------|--------|--|
| UL/CSA | ○ | |
| O.F. (Max. N) | 15.7 | |
| R.F. (Min. N) | 4.4 | |
| P.T. (Max. mm) | 1.7 | |
| O.T. (Min. mm) | 5.6 | |
| M.D. (Max. mm) | 0.51 | |
| R.T. (Min. mm) | 0.38 | |

*Dimensional tolerance is ±0.4 unless otherwise specified.

Side roller plunger

(unit: mm)

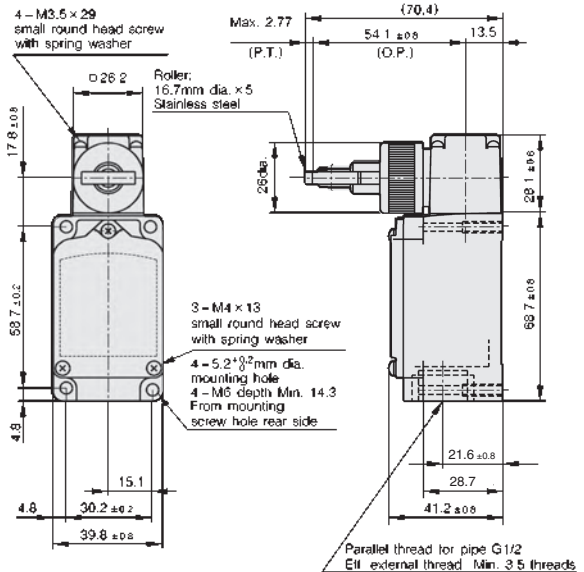

| Catalog listing | 3LS1-J | |
|-----------------|--------|--|
| UL/CSA | ○ | |
| O.F. (Max. N) | 40.1 | |
| R.F. (Min. N) | 8.9 | |
| P.T. (Max. mm) | 2.77 | |
| O.T. (Min. mm) | 5.6 | |
| M.D. (Max. mm) | 1.02 | |

*Dimensional tolerance is ±0.4 unless otherwise specified.

Non-directional operation type

(unit: mm)



8LS3-J


8LS152-J

8LS125-J


| Actuator type | Non-directional operation type | | | |
|-----------------|--------------------------------|-------------|------------|----------|
| | Spring rod | Coil spring | Steel wire | |
| Catalog listing | Standard type | 8LS3-J | 8LS152-J | 8LS125-J |
| | Heat-resistant | 8LS3-JH | — | — |
| | Cold-resistant | — | 8LS152-JL | — |
| UL/CSA | ○(excluding H and L types) | | | |
| O.F. (Max. N) | 1.4 ^{*1} | 0.28 | | |
| P.T. (Max. mm) | 28.6 ^{*2} | 55 | | |

*1. 1.7 N max. for 8LS152-JL
 *2. 50 mm max. for 8LS152-JL


8LS3-J

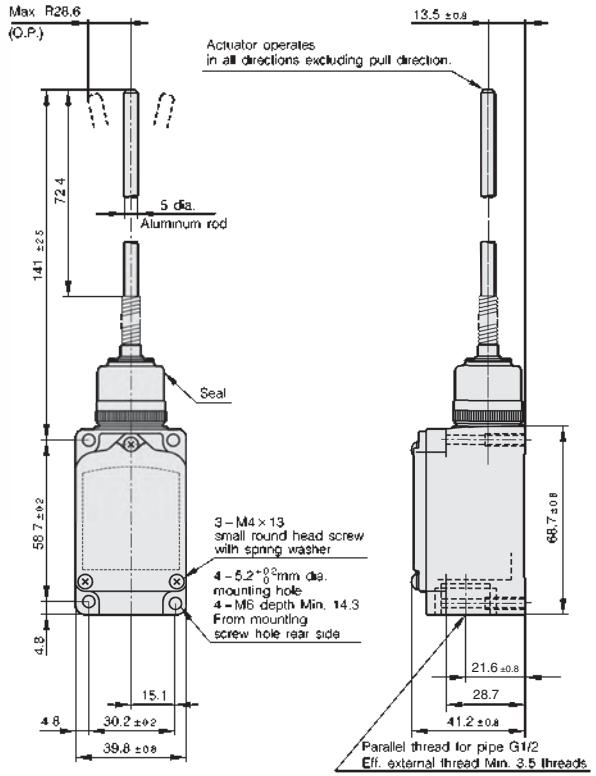

8LS125-J

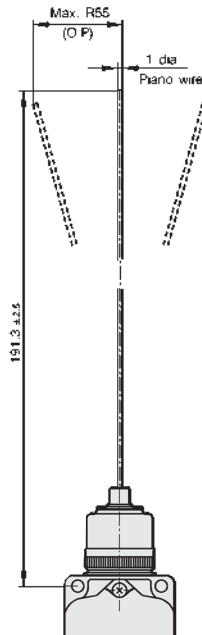

8LS152-J

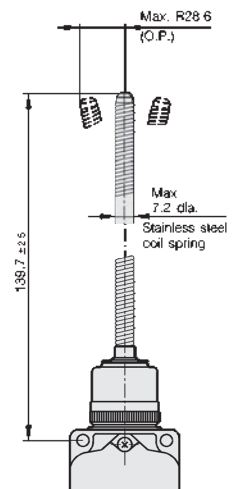

*Dimensional tolerance is ±0.4 unless otherwise specified.

PHOTOELECTRIC SENSORS & SWITCHES

MEASUREMENT SENSORS

PROXIMITY SWITCHES

LIMIT SWITCHES

SAFETY KEY SWITCHES

LIMIT SWITCHES WITH POSITIVE OPENING MECHANISM

GENERAL PURPOSE LIMIT SWITCHES

TECHNICAL GUIDE FOR LIMIT SWITCHES

EXPLOSION-PROOF SWITCHES

TECHNICAL GUIDE FOR EXPLOSION-PROOF SWITCHES

STANDARD

SPATTER-GUARDED

1LS-J7□□

1LS-J8□□

1LS□-J401

VCL□□□

SL1□□□

SL1□□C


Connector with cable



See page F-001

Side rotary type without lever

(unit: mm)

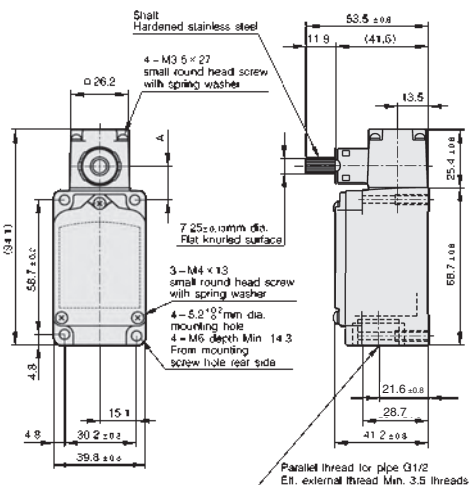


*Dimensional tolerance is ±0.4 unless otherwise specified.

| Catalog listing | Standard type | 1LS2-J | 1LS9-J | 1LS-J501 | 1LS-J551 | 1LS23-J | 1LS-J51 |
|----------------------------|---|-----------------------------------|--------------------------------|-----------------------------------|--|---------------------------|----------|
| | Heat-resistant | 1LS2-JH | — | — | — | — | — |
| Cold-resistant | — | — | — | 1LS-J501L | — | — | 1LS-J51L |
| Corrosion resistant | 1LS2-JM | — | — | — | — | — | — |
| Operating characteristics | Standard travel, standard characteristics | Standard travel, high sensitivity | High overtravel, standard type | High overtravel, high sensitivity | Standard travel, light operation, standard characteristics | High overtravel, 90° T.T. | |
| UL/CSA/GB | UL/CSA (excluding types H, L) | | | | | | |
| O.F. (Max. N•m) | 0.52 | | 0.34 | | 0.22 | | 0.34 |
| R.F. (Min. N•m) | 0.086 | | 0.038 | | 0.029 | | 0.019 |
| P.T. (Max. °) | 20 | 5 ⁺² ₀ | 20 | 10 ⁺² | 20 | 30 | |
| O.T. (Min. °) | 30 | 30 | 55 | 62 | 30 | 60 | |
| M.D. (Max. °) | 12 | 3 | 12 | 5 | 12 | 15 | |
| Catalog listing with lever | 1LS1-J | 1LS19-J | 1LS-J500 | 1LS-J550 | 1LS10-J | 1LS-J50 | |
| Section A dimensions | 14.7±0.8 | | | 17.2±0.8 | | | |

Roller lever type with indicator lamp (typical catalog listing 1LS1-JEC)

(unit: mm)

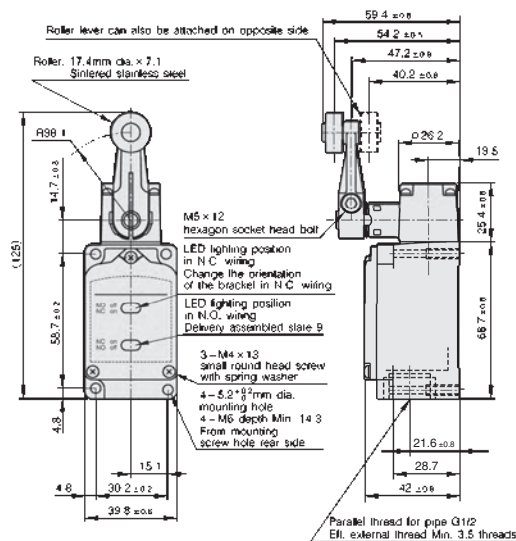

*Dimensional tolerance is ±0.4 unless otherwise specified.

| Catalog listing | 1LS1-JEC |
|-----------------|----------|
| UL/CSA | ○ |
| O.F. (Max. N) | 13.4 |
| R.F. (Min. N) | 2.2 |
| P.T. (Max. °) | 20 |
| O.T. (Min. °) | 30 |
| M.D. (Max. °) | 12 |


*For models other than 1LS1-JEC, all dimensions except those of the actuator are exactly the same.

CONNECTOR TYPE APPEARANCE, OPERATING CHARACTERISTICS AND EXTERNAL DIMENSIONS

● Connector type

Roller lever type

(unit: mm)

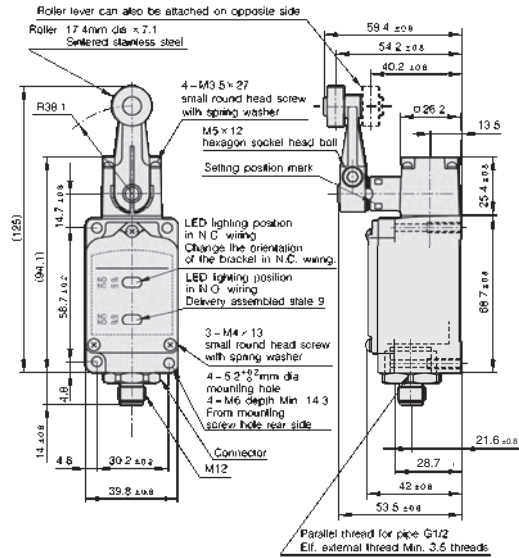


*Dimensional tolerance is ±0.4 unless otherwise specified.

| Basic catalog listing | 1LS1-J | 1LS19-J | 1LS-J550 |
|---------------------------|---|-----------------------------------|-----------------------------------|
| Quick connector for DC | 1LS1-JEC-PD | 1LS19-JEC-PD | 1LS-J550EC-PD |
| Operating characteristics | Standard travel, standard characteristics | Standard travel, high sensitivity | High overtravel, high sensitivity |
| O.F. (Max. N) | 13.4 | | 8.9 |
| R.F. (Min. N) | 2.2 | | 0.98 |
| P.T. (Max. °) | 20 | 5 ⁺² ₀ | 10 ⁺² ₋₁ |
| O.T. (Min. °) | 30 | 30 | 62 |
| M.D. (Max. °) | 12 | 3 | 5 |

Roller plunger type

(unit: mm)

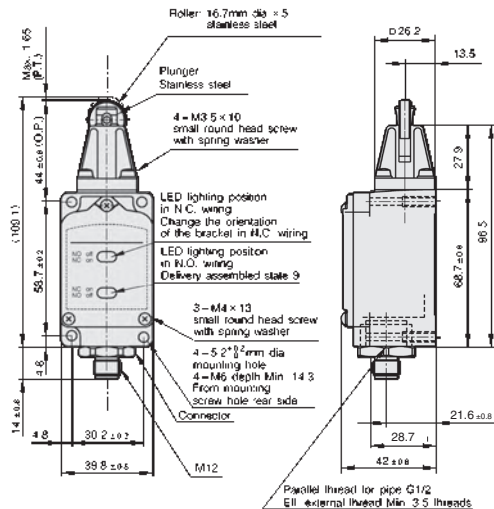

*Dimensional tolerance is ±0.4 unless otherwise specified.

| Basic catalog listing | 5LS1-J |
|------------------------|-------------|
| Quick connector for DC | 5LS1-JEC-PD |
| O.F. (Max. N) | 26.7 |
| R.F. (Min. mm) | 8.9 |
| P.T. (Max. mm) | 1.7 |
| O.T. (Min. mm) | 5.6 |
| M.D. (Max. mm) | 0.51 |

PHOTOELECTRIC
SENSORS &
SWITCHES

MEASUREMENT
SENSORS

PROXIMITY
SWITCHES

LIMIT
SWITCHES

SAFETY
KEY SWITCHES

LIMIT SWITCHES
WITH POSITIVE
OPENING MECHANISM

GENERAL PURPOSE
LIMIT SWITCHES

TECHNICAL GUIDE
FOR
LIMIT SWITCHES

EXPLOSION-PROOF
SWITCHES

TECHNICAL GUIDE FOR
EXPLOSION-PROOF
SWITCHES

STANDARD
□LS□

SPATTER-GUARDED
□LS□□

1LS-J7□□

1LS-J8□□

1LS□-J401

VCL□□□

SL1□□□

SL1□□C

Connector
with cable




See page
F-001

Boot seal roller plunger type

(unit: mm)

| | | |
|-------------------------------|--------------------|------|
| Basic catalog listing | 5LS7-J | |
| Quick connector for DC | 5LS7-JEC-PD | |
| O.F. | (Max. N) | 15.7 |
| R.F. | (Min. N) | 4.4 |
| P.T. | (Max. mm) | 1.7 |
| O.T. | (Min. mm) | 5.6 |
| M.D. | (Max. mm) | 0.51 |

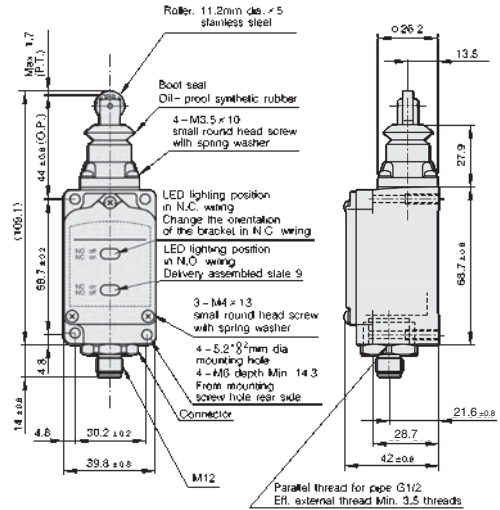


*Dimensional tolerance is ± 0.4 unless otherwise specified.

●Preloaded connector type

Roller lever type

(unit: mm)

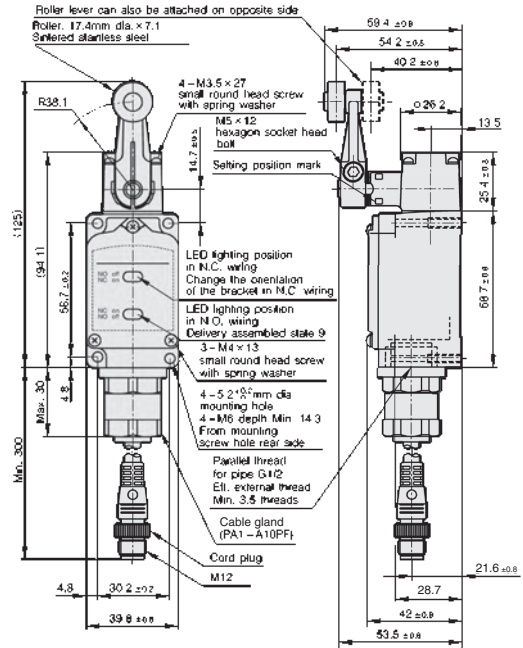


*Dimensional tolerance is ± 0.4 unless otherwise specified.

| Basic catalog listing | 1LS1-J | 1LS19-J | 1LS-J550 |
|--|---------------|----------------|-----------------|
| Preloaded connector for DC, cable length 0.3 m | 1LS1-JEC-PD03 | 1LS19-JEC-PD03 | 1LS-J550EC-PD03 |
| UL/CSA (C-UL) | ○ | ○ | ○ |
| O.F. | | 13.4 | 8.9 |
| R.F. | | 2.2 | 0.98 |
| P.T. | | 5^{+2}_0 | 10^{+2}_1 |
| O.T. | | 30 | 62 |
| M.D. | | 3 | 5 |

Roller plunger type

(unit: mm)

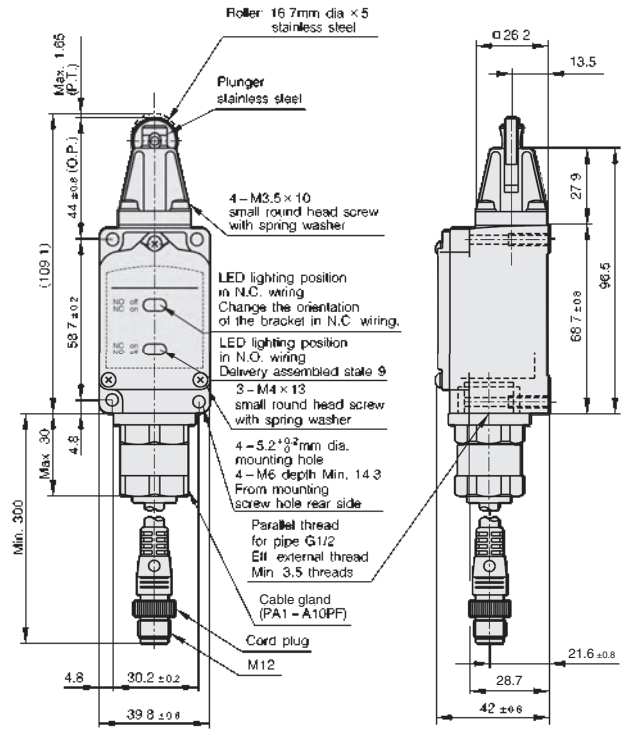


*Dimensional tolerance is ±0.4 unless otherwise specified.

| Basic catalog listing | 5LS1-J |
|--|---------------|
| Preleaded connector for DC, cable length 0.3 m | 5LS1-JEC-PD03 |
| UL/CSA (C-UL) | ○ |
| O.F. (Max. N) | 26.7 |
| R.F. (Min. N) | 8.9 |
| P.T. (Max. mm) | 1.7 |
| O.T. (Min. mm) | 5.6 |
| M.D. (Max. mm) | 0.51 |

Boot seal roller plunger type

(unit: mm)

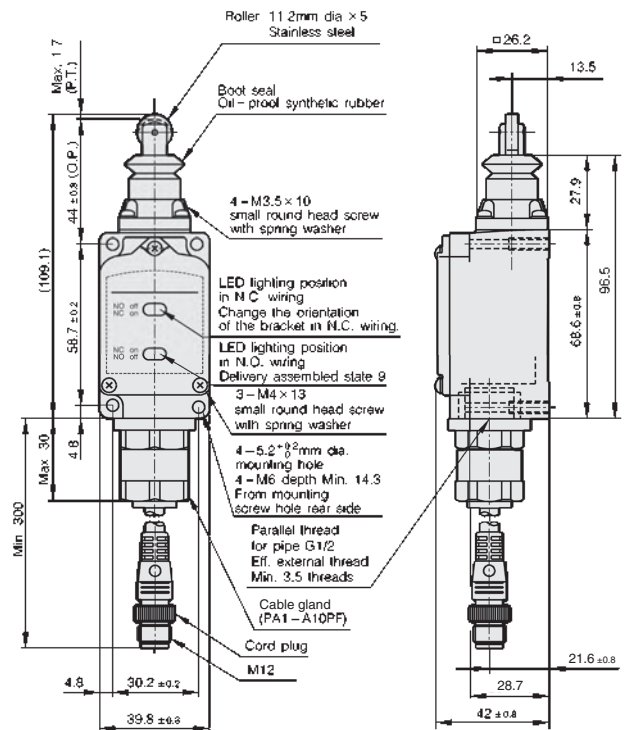

*Dimensional tolerance is ±0.4 unless otherwise specified.

| Basic catalog listing | 5LS7-J |
|--|---------------|
| Preleaded connector for DC, cable length 0.3 m | 5LS7-JEC-PD03 |
| UL/CSA (C-UL) | ○ |
| O.F. (Max. N) | 15.7 |
| R.F. (Min. N) | 4.4 |
| P.T. (Max. mm) | 1.7 |
| O.T. (Min. mm) | 5.6 |
| M.D. (Max. mm) | 0.51 |

PHOTOELECTRIC SENSORS & SWITCHES

MEASUREMENT SENSORS

PROXIMITY SWITCHES

LIMIT SWITCHES

SAFETY KEY SWITCHES

LIMIT SWITCHES WITH POSITIVE OPENING MECHANISM

GENERAL PURPOSE LIMIT SWITCHES

TECHNICAL GUIDE FOR LIMIT SWITCHES

EXPLOSION-PROOF SWITCHES

TECHNICAL GUIDE FOR EXPLOSION-PROOF SWITCHES

STANDARD

□LS□

SPATTER GUARDED □LS□□

1LS-J7□□

1LS-J8□□

1LS□-J401

VCL□□□

SL1□□□

SL1□□C



Connector with cable




See page F-001

Auxiliary parts













● Lamp cover

| Catalog listing | LS-29PA1 (standard type) | LS-9PAW (spatter-guarded) | LS-29PAEC (standard type) | LS-9PAWC (spatter-guarded) |
|-----------------|---|------------------------------|---|-------------------------------|
| Specifications | Neon lamp for 100/200 Vac | | LED lamp for 12 to 125 Vac/dc | |
| Appearance |  | |  | |

● Shaft cover

| Catalog listing | Material | Shape |
|-----------------|-------------------------------|--|
| PA-J269 | Silicone rubber (Black) |  (10 pieces per set) |


● Auxiliary actuators

| Catalog listing | Appearance | Compatible switch | Size/material of roller actuator | Lever length(mm) | Lever tightening method and material | |
|------------------------------------|---|--------------------|--|--|---|---|
| 6PA78-J |  | 1LS Series | φ17.4 × 7.1 Sintered stainless steel roller | 38.1 | M5 hexagon socket head bolt. Chrome molybdenum steel. | |
| 6PA-J148 | | | | | M5 hexagon socket head bolt. Stainless steel. | |
| 6PA78-JW (spatter-guarded) | | | M5 lock nut. Distance across flats 8 mm. Stainless steel. | | | |
| 6PA78-JM (stainless steel) |  | | φ19 × 7.1 Black nylon roller | 50 | M5 double lock nut. Distance across flats 8 mm. Stainless steel. | |
| 6PA-J45 |  | | φ17.4 × 7.1 Sintered stainless steel roller | | 60 | M5 hexagon socket head bolt. Chrome molybdenum steel. |
| 6PA-J45W (spatter-guarded) | | | | M5 hexagon socket head bolt. Chrome molybdenum steel. | | |
| LS-6PA79-201 |  | | 1LS10-J Series | φ17.4 × 6.4 Black nylon roller | 26 to 89 | M5 hexagon socket head bolt. Chrome molybdenum steel. |
| PA-J11 |  | | | φ17.4 × 7.1 Sintered stainless steel roller | | M5 hexagon socket head bolt. Stainless steel. |
| 6PA44-J |  | | | φ17.4 × 6.4 Black nylon roller | 26 to 89 | M5 double lock nut. Distance across flats 8 mm. Stainless steel. |
| LS-6PA58 | | | | φ3.2 Hardened stainless steel rod | | 304.6 |
| 6PA-J54 |  | φ2.3 Piano wire | | 255 | M5 lock nut. Distance across flats 8 mm. | |
| 6PA63-J |  | 6LS Series | | φ17.4 × 7.1 Sintered stainless steel roller | 38.1 | M5 hexagon socket head bolt. Chrome molybdenum steel. |
| 6PA-J40 |  | | | | | M5 hexagon socket head bolt. Stainless steel. |
| 6PA43-J |  | 6LS Series | | φ17.4 × 7.1 Sintered stainless steel roller | 38.1 | M5 hexagon socket head bolt. Chrome molybdenum steel. |
| 6PA-J176 | | | | | | M5 hexagon socket head bolt. Stainless steel. |
| 6PA74-J (rollers on same side) |  | 6LS Series | | φ17.4 × 7.1 Sintered stainless steel roller | 38.1 | M5 hexagon socket head bolt. Chrome molybdenum steel. |
| 6PA80-J (rollers on both sides) |  | | M5 hexagon socket head bolt. Chrome molybdenum steel. | | | |

AUXILIARY PART DIMENSIONS


(unit: mm)

Lamp cover




LS-29PA1, LS-9PAW
LS-29PAEC, LS-9PAWC


Auxiliary actuators




6PA-J148, 6PA78-J
6PA78-JW




6PA78-JM




LS-6PA79-201




6PA-J45
6PA-J45W




6PA80-J




6PA74-J




6PA44-J
LS-6PA58




6PA43-J
6PA-J176




6PA63-J



6PA-J40



6PA-J54



PA-J11

PHOTOELECTRIC
SENSORS &
SWITCHES

MEASUREMENT
SENSORS

PROXIMITY
SWITCHES

LIMIT
SWITCHES

SAFETY
KEY SWITCHES

LIMIT SWITCHES
WITH POSITIVE
OPENING MECHANISM

GENERAL PURPOSE
LIMIT SWITCHES

TECHNICAL GUIDE
FOR
LIMIT SWITCHES

EXPLOSION-PROOF
SWITCHES

TECHNICAL GUIDE FOR
EXPLOSION-PROOF
SWITCHES

STANDARD
 LS

SPATTER-GUARDED
 LS

1LS-J7

1LS-J8

1LS-J401

VCL-

SL1-

SL1-

Connector
with cable



See page
F-001

WHEN USING LS SERIES LIMIT SWITCHES


1. Changing the position of the operating head

The operating head can be set to four positions. To set to the desired position, remove the four head tightening screws and rotate the head 90° to one of the four different positions. When changing the direction of the operating head, change the direction of the internal plunger at the same time (excluding 1LS-J500, 1LS-J550 and 1LS-J50). The roller plunger can be set to one of two different positions 90° apart.



2. Changing the operating direction of roller lever type


The operation direction can be set to three sequences (excluding 1LS-J500, 1LS-J550 and 1LS-J50). Lever type limit switches can be set to operate electrically when moved either clockwise or counterclockwise by changing the direction of the internal stepped plunger.

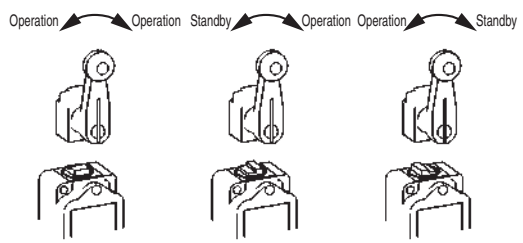


3. Indicating the operation set position on the roller lever type

Excessive or insufficient pushing of the lever can be eliminated to ensure stable prolonged use by setting so that the pointer that rotates with the lever enters the head's protrusion zone. The position of the protrusion zone varies with different model types, such as standard, high sensitivity, and 90° T.T. types.

3.1 Standard type (1LS1-J, 1LS-J50 Series)

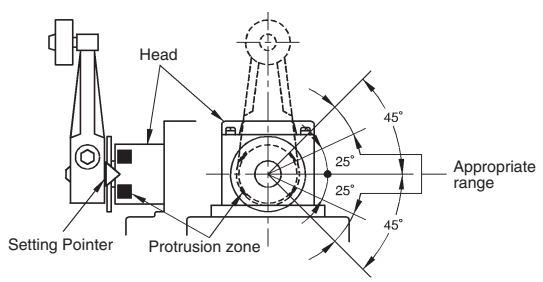


3.2 High-sensitivity type (1LS19-J, 1LS-J55 Series)

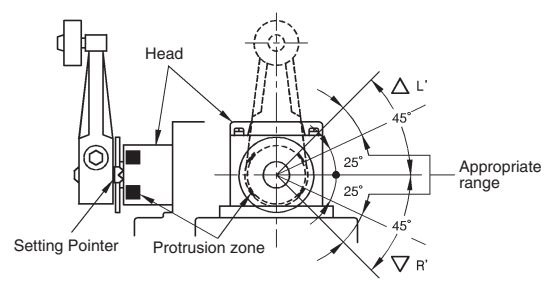


4. Indicating the operation set position of roller plunger type (5LS1-J)

The indentation on the roller plunger is for preventing excessive or insufficient plunger operation. Determine the position of the actuating element so that the indentation on the plunger fits into the top surface of the bushing.

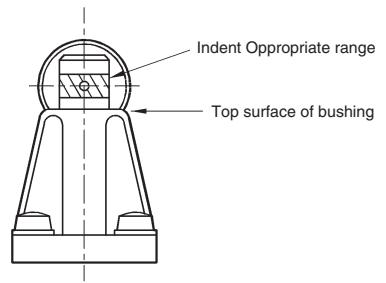

5. How to set the actuating element

5.1 Roller lever type

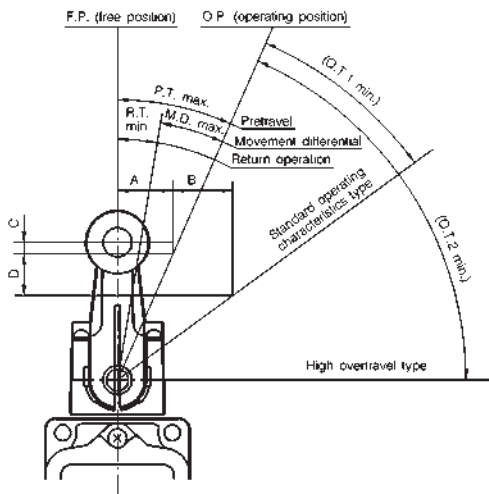

| Symbol | Operating angle (°) | | | | |
|-----------|--------------------------------|-------|-------|------|------|
| | P.T. | O.T.1 | O.T.2 | R.T. | M.D. |
| 1LS1-J□ | 20 | 30 | — | 5 | 12 |
| 1LS19-J□ | 5 ⁺² ₀ | 30 | — | 1.5 | 3 |
| 1LS-J500□ | 20 | — | 55 | 5 | 12 |
| 1LS-J550□ | 10 ⁺² ₋₁ | — | 62 | 5 | 5 |

| Symbol | Operating force (N) | | A,B,C,D distance (mm) | | | |
|-----------|---------------------|------|-----------------------|------|-----|------|
| | O.F. | R.F. | A | B | C | D |
| 1LS1-J□ | 13.4 | 2.2 | 13.0 | 16.1 | 2.3 | 11.3 |
| 1LS19-J□ | 13.4 | 2.2 | 3.3 | 18.5 | 0.1 | 6.7 |
| 1LS-J500□ | 8.9 | 0.98 | 13.0 | 23.8 | 2.3 | 25.9 |
| 1LS-J550□ | 8.9 | 0.98 | 6.6 | 29.6 | 0.6 | 25.7 |

Key to the abbreviations used in the above tables:


- P.T. : Pretravel
- O.T. 1 : Overtravel (standard switch)
- O.T. 2 : Overtravel (high overtravel switch)
- R.T. : Return operation
- M.D. : Movement differential
- O.F. : Operating force
- R.F. : Release force

5.2 Height from switch mounting hole to actuating element

Roller lever type

For roller lever type switches, we recommend setting the distance from the switch mounting hole to the actuating element as shown below.


Example: 1LS1-J (unit: mm)

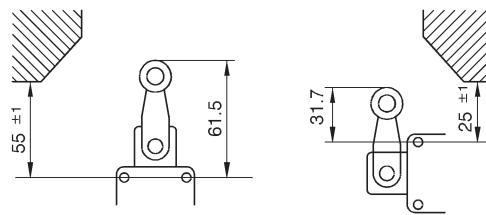

Roller plunger type

For roller plunger type switches, we recommend setting the distance from the switch mounting hole to the actuating element as shown below.

Example: 5LS1-J (unit: mm)

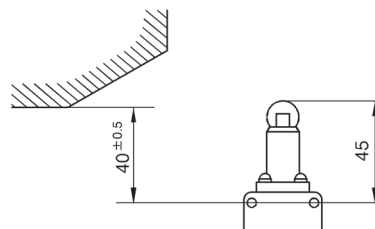


6. Handling the connector and prelead connector

6.1 Tightening the fixing cap ring and outside screw lock ring

If the screw of the mating part is made of resin, the threads can easily be damaged when the connector is first tightened. When assembling the connector, align the center of the cores, push in as far as possible, and then turn to tighten.

Be sure to tighten fully by hand. The recommended tightening torque is 0.4 to 0.6 N·m. Use of a tightening tool may damage the connector. If the connector is not tightened firmly, IP67 protection may be lost, or the connector may come loose.

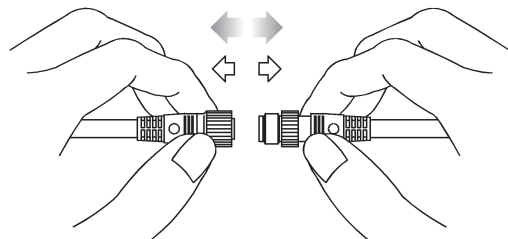

6.2 Inserting and removing connectors

Before inserting or removing connectors, be sure to turn the power OFF. When removing, hold the connector itself--do not pull by the cable.

PHOTOELECTRIC
SENSORS &
SWITCHES

MEASUREMENT
SENSORS

PROXIMITY
SWITCHES

LIMIT
SWITCHES

SAFETY
KEY SWITCHES

LIMIT SWITCHES
WITH POSITIVE
OPENING MECHANISM

GENERAL PURPOSE
LIMIT SWITCHES

TECHNICAL GUIDE
FOR
LIMIT SWITCHES

EXPLOSION-PROOF
SWITCHES

TECHNICAL GUIDE FOR
EXPLOSION-PROOF
SWITCHES

STANDARD

□LS□

SPATTER-GUARDED

□LS□□

1LS-J7□□

1LS-J8□□

1LS□-J401

VCL□□□

SL1□□□

SL1□□C


Connector
with cable



See page
F-001


6.3 Cautions when bending cables

The minimum bend radius (R) of the cable is 80 mm. Allow sufficient cable for bends.

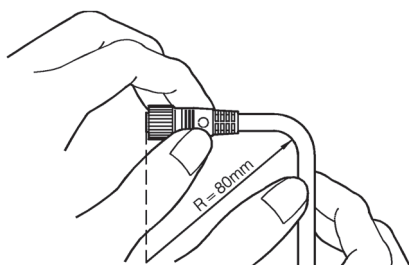

6.4 Installation of connector type switches

(unit: mm)

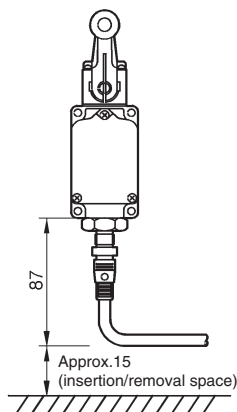

6.5 Cautions when replacing connectors

When removing connectors to replace the switch or cable, wipe the connector and the surrounding area thoroughly to remove any water. After removing the connector, do not allow it to be immersed in chemicals or powder, or to be dropped. If the connector is immersed in a fluid, allow it to fully dry before connecting again. If the connector is dropped in powder, wipe it off completely before connecting again. Failure to observe these precautions may result in a short circuit or a failed connection.

7. Other

7.1 Protective structure

- IP67 protection does not assure complete waterproofing. Switch should not be in constant contact with water.
- Avoid use where external force is applied at all times on the connecting section of the connector.
- Do not use the body as a step or place heavy objects on top of it.

7.2 Ensuring a good seal

- When general-purpose limit switches are used in locations subject to splashing by water, oil, dirt and dust, or chips, water or oil sometimes enters the switch from the conduit due to capillary action. For this reason, be sure to use a sealed connector compatible with the cable.

- When the screws in the head or covers are loosened to change the operating direction of the switch, or the relationship between switch operation and the indicator lamp (lamp ON during switch standby / during switch operation), tighten the screws to the recommended tightening torque to ensure a good seal.

Recommended tightening torque

Cover: 1.3 to 1.7 N·m (M4 screw)

Head: 0.8 to 1.2 N·m (M3.5 screw)

7.3 Attaching switches

- Tighten each of the parts on the limit switch according to the appropriate tightening torques listed in the performance tables. Overtightening damages screws and other parts. On the other hand, insufficient tightening of screws lowers the effectiveness of the seal and reduces various performance characteristics.
- Do not leave or use covers and conduit parts open. Water, dirt, or dust may enter, which causing malfunction.
- Prevent impact to the lever body and head. Failure to do so might deform the actuator or cause defective switch return.
- Do not use silicone rubber electrical lead insulation, silicone adhesive or grease containing silicone. Doing so might result in defective electrical conductivity.

7.4 Wiring

- Do not perform wiring with the power ON. Doing so might cause electric shock, or the machine may start unexpectedly, causing an accident.
- Use crimp-type terminal lugs with covered insulation for electrical leads to prevent contact with covers and housings. If a crimp-type terminal lug contacts a cover, the cover may no longer shut or a ground fault may occur.
- Use sealed connectors (PA1 Series, etc. sold separately) or flexible tubing (PA3 Series) with IP67 or equivalent seal for conduits.
- Firmly tighten covers and conduits. If covers and conduits are not sufficiently tightened, the seal will be impaired and switch performance will no longer be assured.

7.5 Adjusting switches

- Do not apply excessive force (5 times O.F.) to the actuator beyond the total travel position. Doing so might damage the switch.
- Keep overtravel between 1/3 to 2/3 of the rated value. Small overtravel might cause the contacts to rattle due to vibration and impact, or may result in defective contact.

8. Environment

- Do not use the product in an environment where the cover may directly come into contact with any strong volatile solvent.
- Do not use the switch in an environment where strong acid or alkali is directly splashed onto it.

9. Other cautions

- Do not apply a lubricant to the sliding part of the actuator or any other component. Application of an inappropriate lubricant may degrade sliding performance or impair the protective structure.
- Remove any foreign substances adhering to the sliding part. Dust or any other foreign substance attached to the sliding part may cause a malfunction.
- Check the actual load.
To increase reliability, confirm that the switch has no problems in actual use before using the switch.

Before use, thoroughly read the "Precautions for use" and "Precautions for handling" in the Technical Guide on pages D-101 to D-112 as well as the instruction manual and product specification for this switch.

Please read "Terms and Conditions" from the following URL before ordering and use.

<https://www.azbil.com/products/factory/order.html>

*[Notice] Specifications are subject to change without notice.
No part of this publication may be reproduced or duplicated
without the prior written permission of Azbil Corporation.*

Other product names, model numbers and company names may be trademarks of the respective company.

Azbil Corporation

Advanced Automation Company

Yamatake Corporation changed its name to Azbil Corporation on April 1, 2012.

1-12-2 Kawana, Fujisawa
Kanagawa 251-8522 Japan

URL: <https://www.azbil.com>

1st Edition : Jan. 2018