

BSI
Bettendorf Stanford



1370 West Main St.
Salem, IL 62881
Phone: 618-548-3555
Fax: 618-548-3557
Email: sales@bettendorfstanford.com
Web: www.Bettendorfstanford.com

BSI 75 Slicer

BSI 75 Slicer Features

OPERATIONAL FEATURES:

- 5 hp motor
- Electronic blade break detection and correction
- Conveyor rest (no product sensors)
- Flighted infeed system
- Lattice mechanism
- RFID safety switches for enhanced safety
- Hardened chrome drums
- Blade/drum scrapers and oilers
- Automatic oiler system
- Aluminum doors/covers
- Stainless steel frame
- Slide out unit frame
- Timing adjustment through control panel



*Optional:
Belted infeed with
top hold down belt*

MAINTENANCE ACCESSORIES:

- Stainless steel doors/covers
- Belted infeed system (optional)

ACCESSORIES:


- Automatic lattice adjustment (standard unit without PLC controls)
- Automatic lattice adjustment with PLC controls
- Automatic blade hone

SPECIFICATIONS:

- Slicing speed: up to 90 loaves per minute
- Blade speed: 1200 ft per minute
- Minimum loaf size: 6" L x 2" H x 3" W (152mm x 51mm x 76mm)
- Maximum loaf size: 16" L x 6" H x 10" W (432mm x 152mm x 254mm)
- Adjusting unit range/standard: 3/8" to 5/8" (9.5mm to 15.9mm)
- Adjusting unit range/special: 1/4" to 5/8" (6.4mm to 15.9mm)
- Adjusting unit range/special: 7/16" to 1" (11.1mm to 25.4mm)
- Electrical: 230/380/460 volt, 50/60 HZ, 3 Ph., 5 HP

AIR: 90 PSIG, AVG 11 SCFM
Peak at 12 SCFM
Supply Line: 1/2" pipe

Control Voltage: 24 volt
Main Electrical: Customer Specs

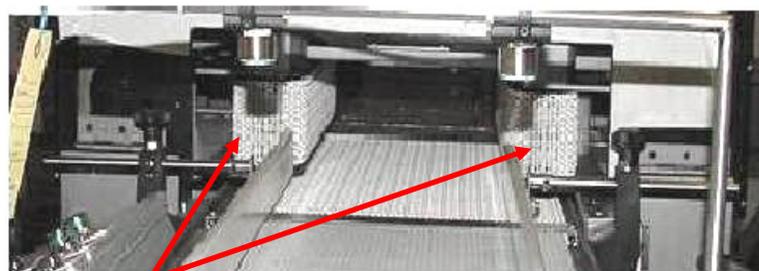

Optional: Belted infeed with side belts for pan bread