




HD B-4 Hinge Slicer

1370 West Main St.
Salem, IL 62881
Phone: 618-548-3555
Fax: 618-548-3557
Email: sales@bettendorfstanford.com
Web: www.Bettendorfstanford.com

HD B-4 Hinge Slicer Features

- Four blade system capable of running eight lanes of hinge sliced product or two lanes of web sliced product
- Normal conveyor speeds of up to 120 fpm. (speeds will be set based on type of product)
- Bottom conveyor uses 26" wide modular belting
- Dual 2hp brake motors drive the four HD blade assemblies
- Bolt on HD blade assemblies with ABEC 5 bearings
- Two of the blades will be in a fixed position, two will be adjustable
- Compression conveyor designed around customer's product specs
- VFD driven compression conveyor
- Option of manual or automatic head lift
- AB micrologix PLC
- AB HMI w/6" touch screen
- AB RFID safety sensors
- Category 3 safeties
- NEMA 4 enclosures
- Stainless steel conveyor framing
- Aluminum side frames on slicer head

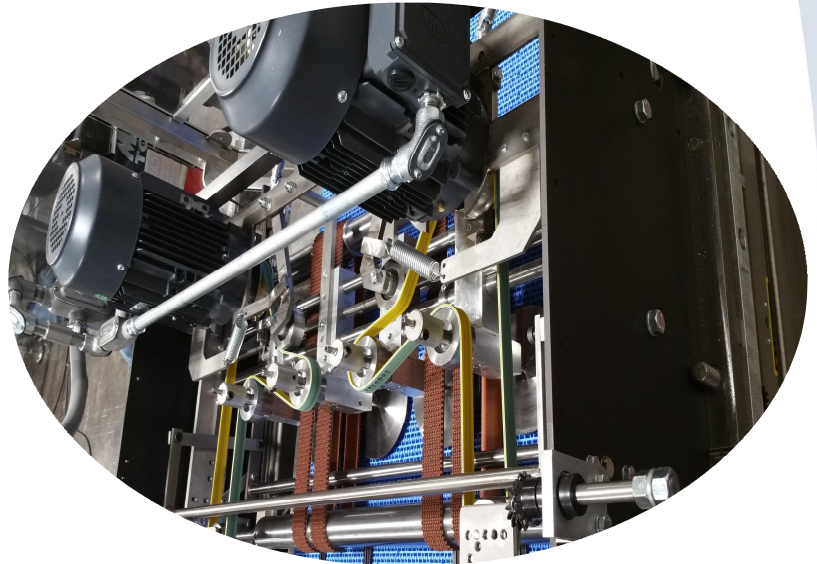

Also available as a dual head system for faster change overs and longer production runs between cleanings

