



1370 West Main St.  
Salem, IL 62881  
Phone: 618-548-3555  
Fax: 618-548-3557  
Email: [sales@bettendorfstanford.com](mailto:sales@bettendorfstanford.com)  
Web: [www.Bettendorfstanford.com](http://www.Bettendorfstanford.com)

## Hybrid 65 Bagger

# Hybrid 65 Bagger Details

## Specifications:

### **Maximum Loaf Size:**

Length 16" (406 mm), width 5 1/2" (140 mm), height 6" (152 mm)

### **Electrical Requirements:**

230/460 volts, 60 Hz, 3-phase AC 15 am service for 2hp drive motor.

Closer unit requirements are additional depending upon the unit.

Other voltages available on request.

### **Rated speed:**

Variable up to 70 loaves per minute.

### **Air requirements:**

12 CFM (340 cm) of free air at 80 PSI (5.625 kg/cm).

### **Weight (Approximate):**

1650 lbs. net (750 kg), 1850 lbs. shipping (840 kg), 2650 lbs. export (1205 kg)

## Accessories:

- Additional conveyor lengths available
- Extra set of scoops
- Stainless Steel Tubular Framing
- Phase change
- Remote scoop adjuster
- Control Techniques drive
- Upper and lower scoops included
- New drive cam for smoother product delivery
- Bag tensioner device

## Enhanced Accessories:

- Stainless steel guarding Available
- Extended discharge

## Standard Features:

- 3hp with VFD and Dynamic brake
- Plant voltage with DC control voltage
- NEMA 4 enclosures with sealtite conduit
- RFID Safeties
- 30:1 Stober low backlash gear box
- 17" Fly wheel for smooth product delivery
- 5'11" infeed conveyor and drive
- Shuttle assembly w/composite bushings
- AB Micrologix PLC with 600 HMI
- Runs consistently 55 to 60 lpm
- Linear motor for flusher and blockade operation
- Automatic double wicket
- Automatic oiler
- Absolute encoder controls all functions

Enhanced scoop arm reduces scoop chatter.



Linear Actuator

Composite bushings

Open frame design.


Flusher Linear Actuator

17" Fly Wheel

Dual bag blow system.



VFD braking through motor.

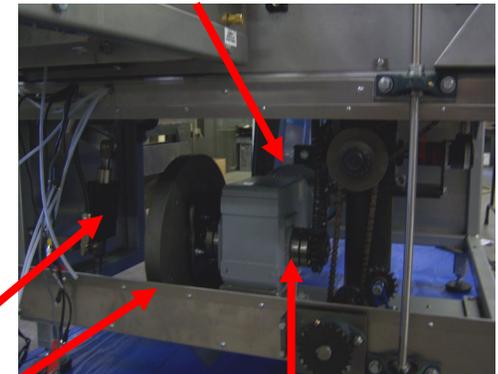

Heavy Duty Servo Style Gear Box